

DACHFIX®

Reliable water retention system for terraces, façades and flat roofs.





DACHFIX®

Reliable water retention system for terraces, façades and flat roofs.

1 Requirements

- fast and reliable removal of surface water on facades, flat roofs and terraces
- compliance with the guidelines and the flat roof relevant DIN standards
- backwater reserve for sudden accumulation of rainwater

2 Application areas

- flat roof green areas
- passable roof areas and terraces
- facade channels
- in front of entrances of balconies and terraces

3 Solution

- powerful backwater reserve for abruptly accumulated water quantities
- horizontal and vertical drainage
- effective protection of walls, doors and windows elements
- open channel systems: channel bodies have drainage possibility on all sides
- barrier-free transitions on terraces
- easy assembling kit



EUROPA SHOPPING CENTRE in Bystrica, Slovakia



Holiday Inn in Bydgoszcz, Poland



Kopernikus School in Nuremberg, Germany



Leonardo Royal Hotel in Munich, Germany



Penthouse in Wiehl, Germany



RECYFIX®
PRO

RECYFIX®
PLUS

RECYFIX®
STANDARD

DACHFIX®

Slotted Channel

FASERFIX®
STANDARD

RECYFIX®POINT
FASERFIX®POINT

RECYFIX®
GREEN

LINEFIX®

The benefits of **DACHFIX®** Channels



Individual Solutions

- Guidelines for the preparation of corner pieces
- optional height adjustment
- Double rip for the preparation of full 0.5 m pieces
- big length for efficient installation

= **flexibility**



Durability

- DACHFIX Channels withstand all weather influences
- permanently corrosion-resistant (DACHFIX RESIST)



= **security**



Quick installation

- easy to handle
- Tongue and groove system for straight installation

= **cost reduction**

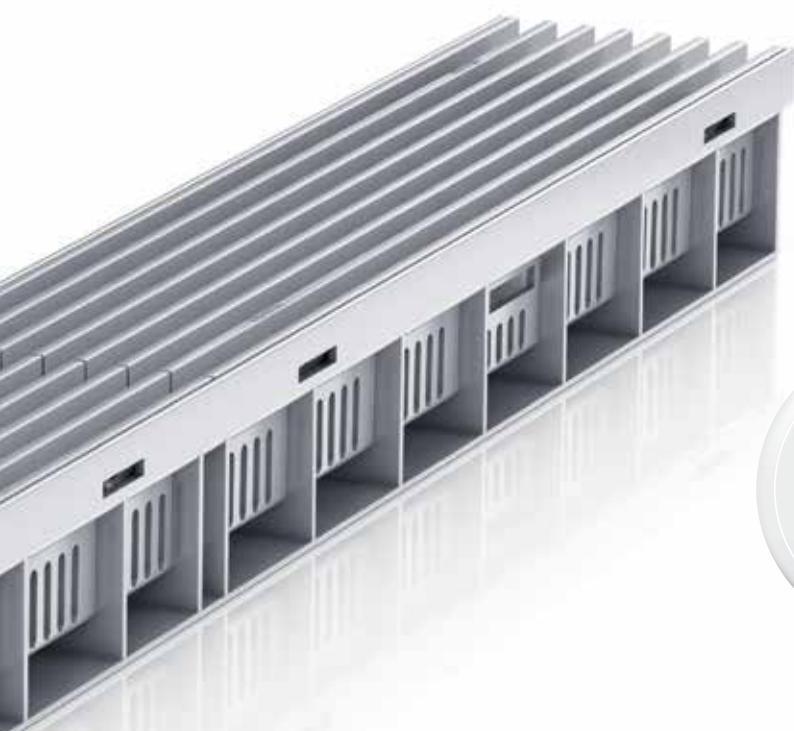

Various grating options

■ in the materials: PE, galvanised steel, stainless steel

= **flexibility**



High resistance

- high resistance against frost, de-icing salt and waterlogging
- DACHFIX Channels withstand all weather conditions
- permanent corrosion resistance (DACHFIX RESIST)

= **durability**

RECYFIX®
PRO

RECYFIX®
PLUS

RECYFIX®
STANDARD

DACHFIX®

Slotted Channel

FASERFIX®
STANDARD

RECYFIX®POINT
FASERFIX®POINT

RECYFIX®
GREEN

LINEFIX®

DACHFIX®

Reliable water retention system for terraces, façades and flat roofs.

Modern residential development featuring corrosion-free and durable DACHFIX drainage system

Durable and corrosion-free:

Façade and terrace drainage with DACHFIX RESIST.

In Sindelfingen in Swabia, a new state-of-the-art project is being developed in a central location. The idea is that the development, with its 40 residential units ranging from exclusive penthouses to owner-occupied apartments, terraced and semi-detached houses through to sheltered housing for the elderly, will provide housing for a mix of age-groups living together. In line with the high-quality interior specification and the attractive architectural design, all materials - including those for the façade and terrace drainage - are reliable and durable.

DACHFIX RESIST features:

- channels and gratings made of high-quality PE - 100% corrosion-free
- long service life even under permanently wet conditions on roof terraces
- PE longitudinal grating in an attractive and elegant silver-grey design
- very suitable for contact with bare feet at terrace doors
- highly reduced installation costs due to easy installation and low weight



**Housing estate in Sindelfingen,
Germany**



**RECYFIX®
PRO**

**RECYFIX®
PLUS**

**RECYFIX®
STANDARD**

DACHFIX®

Slotted Channel

**FASERFIX®
STANDARD**

**RECYFIX®POINT
FASERFIX®POINT**


**RECYFIX®
GREEN**


LINEFIX®

DACHFIX®

Reliable water retention system for terraces, façades and flat roofs.

DACHFIX Channels comply with the flat roof guidelines and are walkable and wheelchair accessible.

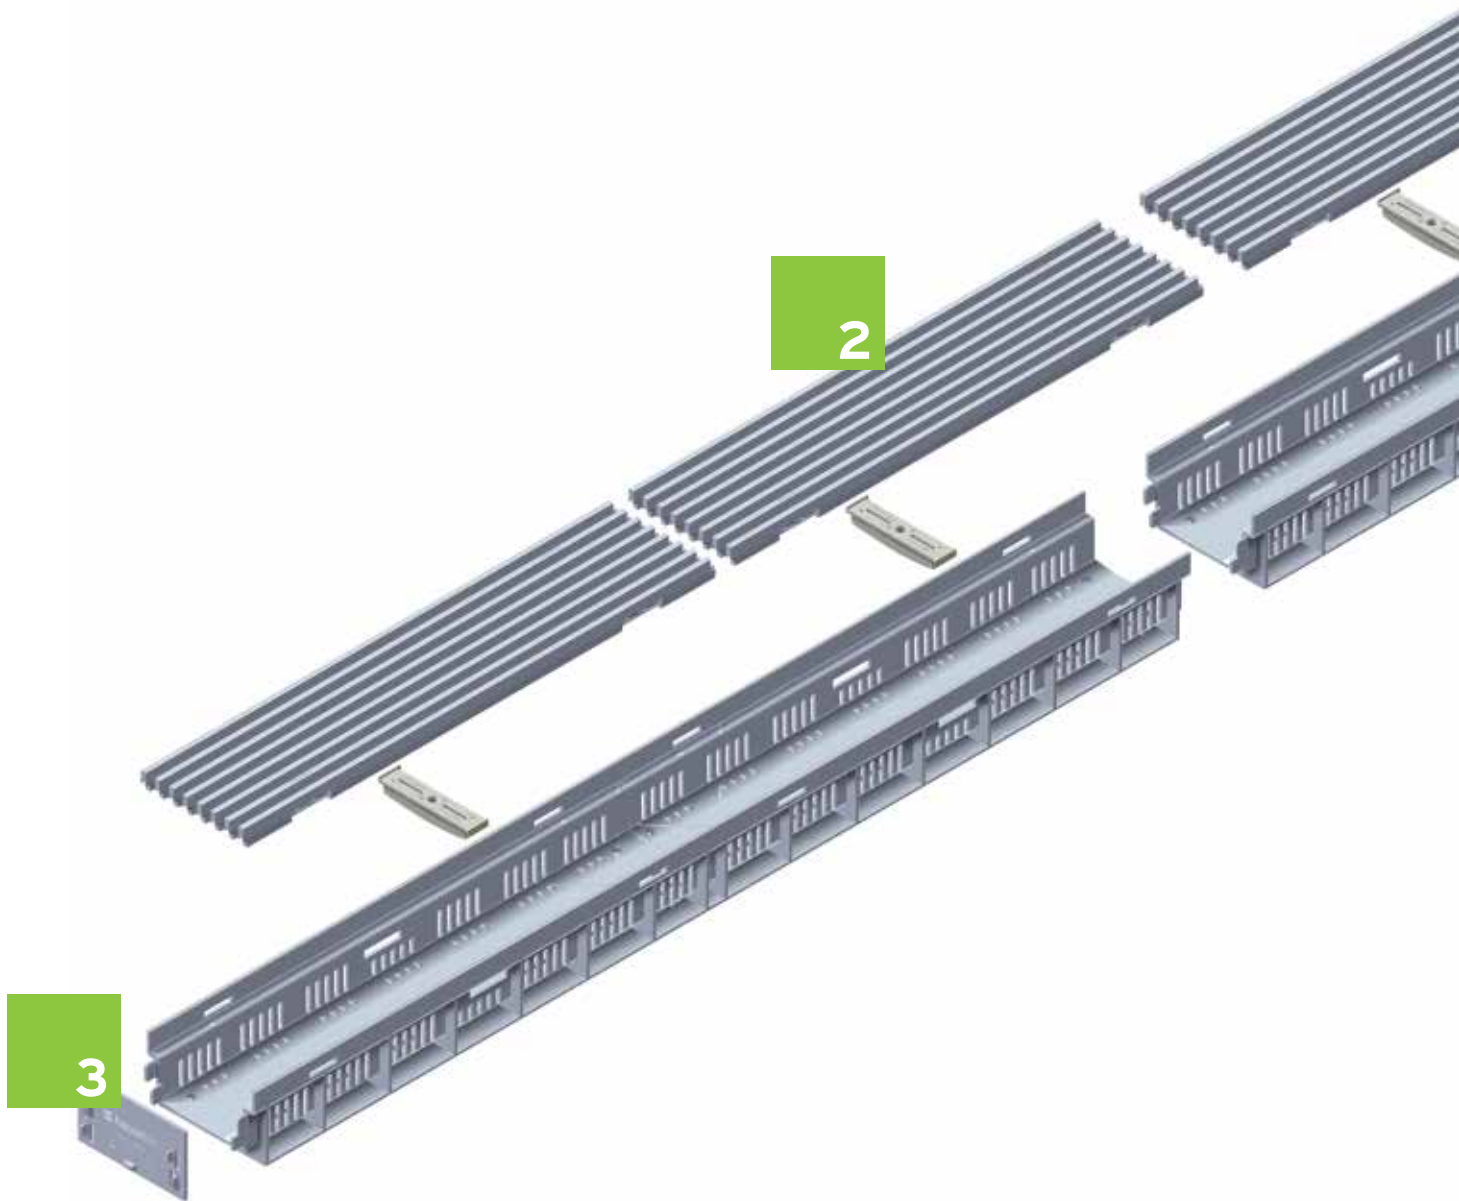

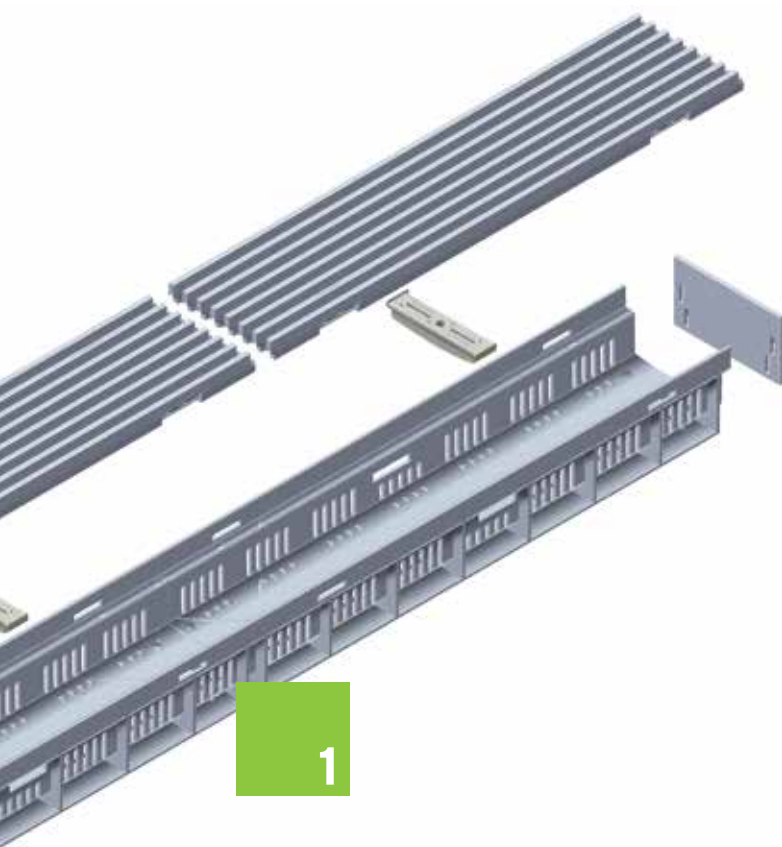

1

■ Corrosion-free channels made of high quality PP with a fix height, height adjustment optional


3

■ PE end caps

2

■ High quality gratings:

- PE longitudinal grating in silver
- PE mesh gratings
- Slotted- and mesh gratings made of galvanised or stainless steel

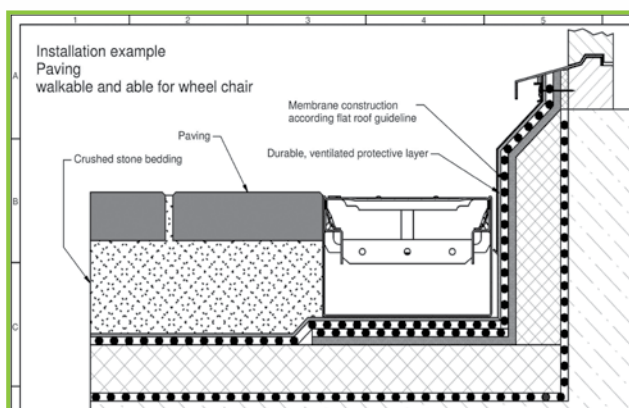

DACHFIX Channels allow a barrier-free access on roof terraces. A height difference of 15 cm between doors or windows elements and sealing level, as prescribed in the flat roof guideline, is not required.

RECYFIX®
PRO

RECYFIX®
PLUS

RECYFIX®
STANDARD

DACHFIX®

Slotted Channel

FASERFIX®
STANDARD

RECYFIX®POINT
FASERFIX®POINT

RECYFIX®
GREEN

LINEFIX®

Your way to the tender text on **hauraton.com**

1 a) Product known

- Go to the product page.



b) Product unknown

- Go to the specification tool.



- choose application
- choose field of application, loading capacity and nominal size
- select from the proposed systems / items

2 Choose required format and add it to your documents



3 Download tender text

- Go to „My documents“.





LINEFIX®	RECYFIX® GREEN	RECYFIX®POINT FASERFIX®POINT	FASERFIX® STANDARD	Slotted Channel	DACHFIX®	RECYFIX® STANDARD	RECYFIX® PLUS	RECYFIX® PRO
----------	-------------------	---------------------------------	-----------------------	-----------------	----------	----------------------	------------------	-----------------

DACHFIX®RESIST

DACHFIX®RESIST Channels made of PE-PP, height 45 mm

Type 45 with longitudinal slotted grating made of PE-PP, silver

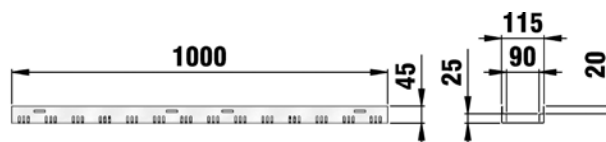
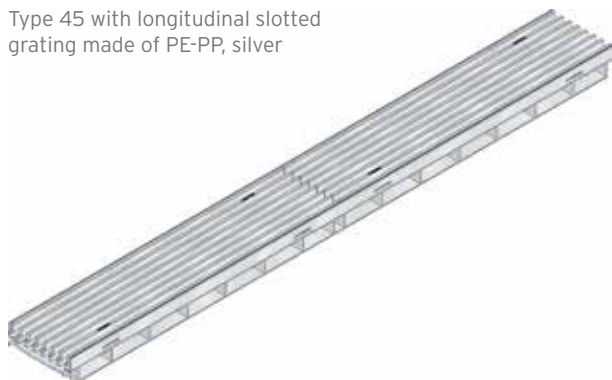


	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Type 45 with longitudinal slotted grating made of PE-PP, silver	1000	115	45	-	637	1,5	63115
NEW Type 45 with longitudinal grating, galvanised	1000	115	45	-	-	4,0	63166
NEW Type 45 with longitudinal grating, stainless steel	1000	115	45	-	-	4,0	63167
Type 45 with mesh grating, PE-PP, silver, MW 8/21	1000	115	45	-	437	1,4	63145
Type 45 with mesh grating, PE-PP, black, MW 8/21	1000	115	45	-	250	1,4	63140
Type 45 with slotted grating galvanised, SW 80/9	1000	115	45	-	256	1,8	63130
Type 45 with slotted grating stainless steel, SW 80/9	1000	115	45	-	256	1,7	63135
Type 45 with mesh grating, galvanised, MW 30/10	1000	115	45	-	828	3,0	63150
Type 45 with mesh grating, stainless steel, MW 8/21	1000	115	45	-	828	2,7	63155
NEW Type 45 with perforated grating, diam. 6 mm, galvanised	1000	115	45	-	-	2,6	63168
NEW Type 45 with perforated grating, diam. 6 mm, stainless steel	1000	115	45	-	-	2,6	63169

DACHFIX®RESIST

DACHFIX®RESIST Channels made of PE-PP, height 75 mm

Type 75 with longitudinal grating, galvanised

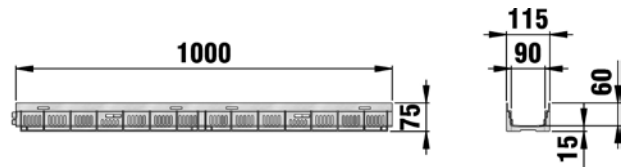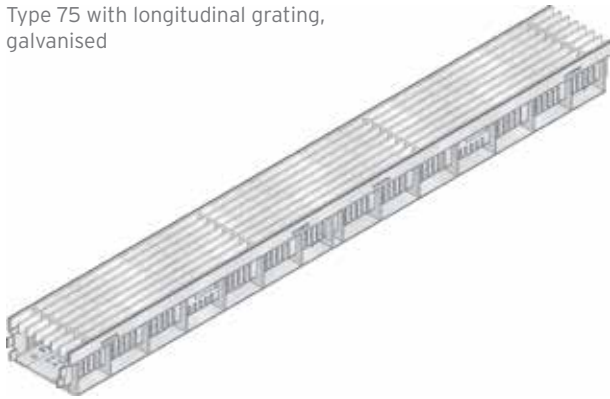

	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Type 75 with longitudinal slot grating, SW 10 mm, made of PE-PP, silver	1000	115	75	28	637	1,6	63015
NEW Type 75 with longitudinal grating, galvanised	1000	115	75	28	-	4,1	63066
NEW Type 75 with longitudinal grating, stainless steel	1000	115	75	28	-	4,1	63067
Type 75 with mesh grating made of PE-PP, silver	1000	115	75	28	511	1,6	63045
Type 75 with mesh grating made of PE-PP, black	1000	115	75	28	250	1,6	63040
Type 75 with slotted grating, galvanised	1000	115	75	28	256	2,9	63030
Type 75 with slotted grating, stainless steel	1000	115	75	28	256	3,1	63035
Type 75 with mesh grating MW 30'/10, galvanised	1000	115	75	28	828	3,3	63050
Type 75 with mesh grating MW 30'/10, stainless steel	1000	115	75	28	828	3,0	63055
NEW Type 75 with perforated grating, diam. 6 mm, galvanised	1000	115	75	28	-	2,7	63068
NEW Type 75 with perforated grating, diam. 6 mm, stainless steel	1000	115	75	28	-	2,7	63069

DACHFIX Channels are walkable and wheelchair passable.
The quality of stainless steel material corresponds to CNS 1.4301.
Fixing of mesh gratings with bolts possible.

RECYFIX®
PRO

RECYFIX®
PLUS

RECYFIX®
STANDARD

DACHFIX®

Slotted Channel

FASERFIX®
STANDARD

RECYFIX®POINT
FASERFIX®POINT

RECYFIX®
GREEN

LINEFIX®

DACHFIX®RESIST

DACHFIX®RESIST, Accessories



End cap made of PE-PP for DACHFIX RESIST Type 45



End cap closed, silver, for DACHFIX RESIST Type 75



PE-PP locking handle, silver, for DACHFIX RESIST



Height adjusting set for DACHFIX RESIST, height 75 mm

	Length mm	Width mm	Height mm	Weight kg	Item No.
End cap made of PE-PP for DACHFIX RESIST Type 45	-	115	45	0,1	63125
End cap closed, silver, for DACHFIX RESIST Type 75	-	115	75	0,1	63025
PE-PP locking handle, silver, for DACHFIX RESIST	100	23	17	0,1	63020
Height adjusting set for DACHFIX RESIST, height 75 mm	-	-	-	0,2	63095

* Please order locking seperately.

** height adjustable from 81 to 102 mm.


DACHFIX®RESIST

LINEFIX®	RECYFIX® GREEN	RECYFIX®POINT FASERFIX®POINT	FASERFIX® STANDARD	Slotted Channel	DACHFIX®	RECYFIX® STANDARD	RECYFIX® PLUS	RECYFIX® PRO
----------	-------------------	---------------------------------	-----------------------	-----------------	----------	----------------------	------------------	-----------------

DACHFIX®STEEL 115

DACHFIX®STEEL 115 Channels made of galvanised steel, height 45 mm

Type 45 with mesh grating MW 8/21, silver

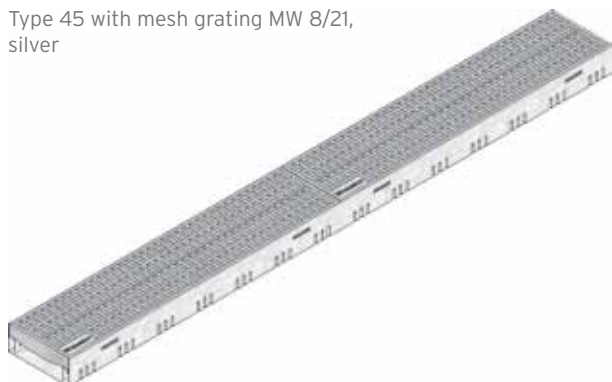



	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Type 45 DP, with longitudinal grating made of PE-PP	1000	115	45	26	637	2,9	61052
Type 45 with longitudinal grating, galvanised	1000	115	45	26	-	5,4	61066
Type 45 with mesh grating MW 8/21, silver	1000	115	45	26	511	3,9	61042
Type 45 with mesh grating MW 8/21, black	1000	115	45	26	250	2,9	61032
Type 45 with slotted grating SW 9, galvanised	1000	115	45	26	256	3,4	61012
Type 45 with mesh grating MW 30/10, galvanised	1000	115	45	26	828	4,6	61022
Type 45 with perforated grating, diam. 6 mm, galvanised	1000	115	45	26	-	4,0	61068

**DACHFIX Channels are walkable and wheelchair passable.
Fixing of mesh gratings with bolts possible.**

DACHFIX®STEEL 115

DACHFIX®STEEL 115 Channels made of galvanised steel, height 75 mm

Type 75 with longitudinal grating, galvanised

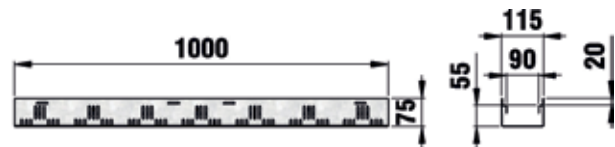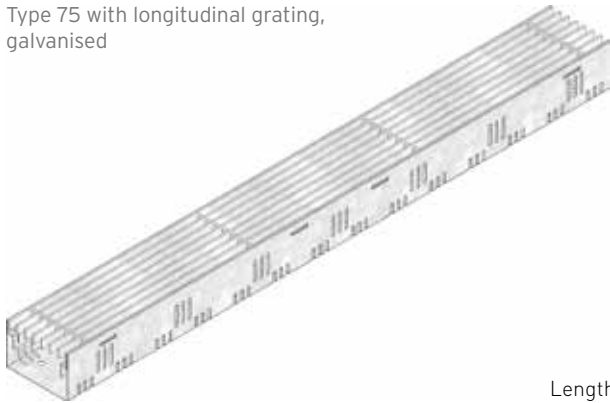

	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Type 75 with longitudinal grating, PE-PP, silver	1000	115	75	59	637	3,4	61152
Type 75 with longitudinal grating, galvanised	1000	115	75	59	-	5,4	61166
Type 75 with mesh grating MW 8/21, silver	1000	115	75	59	511	3,5	61142
Type 75 with mesh grating MW 8/21, black	1000	115	75	59	250	3,5	61132
Type 75 with slotted grating SW 9, galvanised	1000	115	75	59	256	3,8	61112
Type 75 with mesh grating MW 30/10, galvanised	1000	115	75	59	828	5,1	61122
Type 75 with perforated grating, diam. 6 mm, galvanised	1000	115	75	59	-	4,0	61168

Fixing of mesh gratings with bolts possible.

RECYFIX®
PRO

RECYFIX®
PLUS

RECYFIX®
STANDARD

DACHFIX®

Slotted Channel

FASERFIX®
STANDARD

RECYFIX®POINT
FASERFIX®POINT


RECYFIX®
GREEN

LINEFIX®

DACHFIX®STEEL 115

DACHFIX®STEEL 115 Channels made of stainless steel, height 45 mm

Type 45 DP, stainless steel,
with longitudinal grating
made of PE-PP


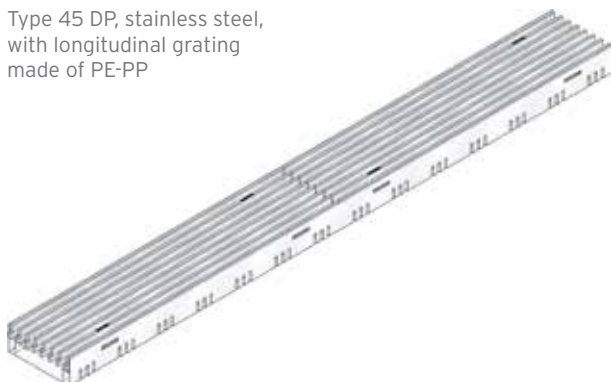


	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Type 45 DP, stainless steel, with longitudinal grating made of PE-PP	1000	115	45	26	637	2,9	61252
Type 45 with Longitudinal grating, stainless steel	1000	115	45	26	-	5,4	61267
Type 45 with mesh grating MW 8/21, silver	1000	115	45	26	511	3,0	61242
Type 45 with mesh grating MW 8/21, black	1000	115	45	26	250	3,0	61232
Type 45 with slotted grating SW 9, stainless steel	1000	115	45	26	256	3,3	61212
Type 45 with mesh grating MW 30/10, stainless steel	1000	115	45	26	828	4,7	61222
Type 45 with perforated grating 6 mm, stainless steel	1000	115	45	26	-	4,0	61269

DACHFIX Channels are walkable and wheelchair passable.
The quality of stainless steel material corresponds to CNS 1.4301.
Fixing of mesh gratings with bolts possible.

DACHFIX®STEEL 115 Channels made of stainless steel, height 75 mm

Type 75 with longitudinal grating,
PE-PP, silver

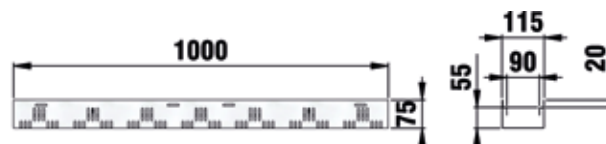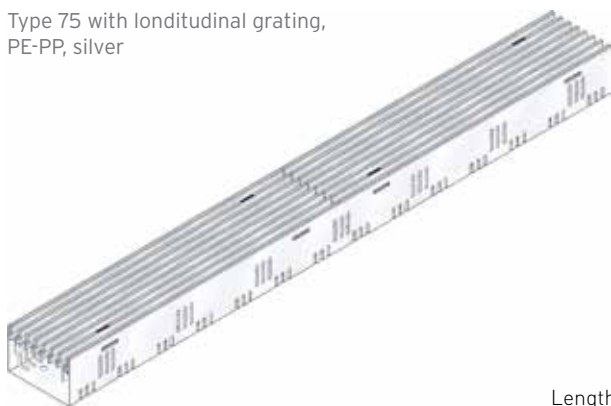

	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Type 75 with longitudinal grating, PE-PP, silver	1000	115	75	59	637	3,5	61352
Type 75 with longitudinal grating, stainless steel	1000	115	75	59	-	5,9	61367
Type 75 with mesh grating MW 8/21, black	1000	115	75	59	250	3,5	61332
Type 75 with mesh grating MW 8/21, silver	1000	115	75	59	511	3,5	61342
Type 75 with slotted grating SW 9, stainless steel	1000	115	75	59	256	3,8	61312
Type 75 with mesh grating MW 30/10, stainless steel	1000	115	75	59	828	5,2	61322
Type 75 with perforated grating 6 mm, stainless steel	1000	115	75	59	-	4,5	61369

Fixing of mesh gratings with bolts possible.

DACHFIX®STEEL 115

DACHFIX®STEEL 115, Accessories



End cap type 45



End cap type 75



Cross-intersection channel,
galvanised



Adjusting set for height
adjustment* of DACHFIX
Type 75, height 75 mm
(3 pieces per metre required)

	Length mm	Width mm	Height mm	Weight kg	Item No. galvanised	Item No. stainless steel
End cap type 45	-	115	45	0,1	61009	61209
End cap type 75	-	115	75	0,1	61109	61309
Cross-intersection channel	1000	70	30	0,7	60800	60801
Adjusting set for height adjustment* of DACHFIX Type 75, height 75 mm (3 pieces per metre required)	-	27	61	0,2	61150	61350

Height adjustable from 82 to 122 mm.

The quality of stainless steel material corresponds to CNS 1.4301.

RECYFIX®
PRO

RECYFIX®
PLUS

RECYFIX®
STANDARD

DACHFIX®

Slotted Channel

FASERFIX®
STANDARD

RECYFIX®POINT
FASERFIX®POINT



RECYFIX®
GREEN

LINEFIX®

DACHFIX®STEEL 200 **NEW**

DACHFIX®STEEL 200 Channels made of galvanised steel, height 50 mm

Type 50 with mesh grating,
MW 30/10

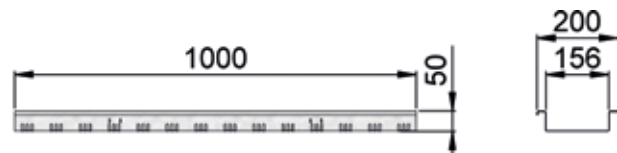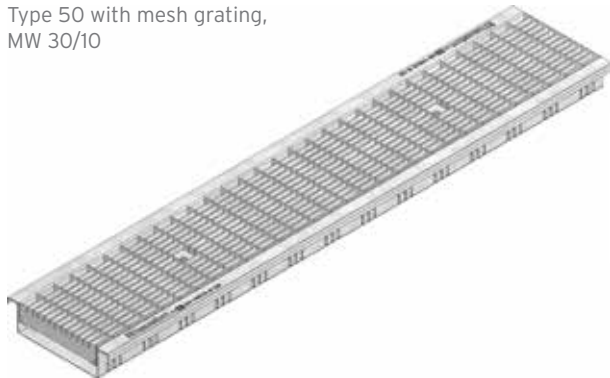

	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Type 50 with mesh grating, MW 30/10	1000	200	50	-	1098	9,1	61622

DACHFIX®STEEL 200 **NEW**

DACHFIX®STEEL 200, Accessories

Cross-intersection channel,
galvanised



	Length mm	Width mm	Height mm	Weight kg	Item No.
Cross-intersection channel, galvanised	1000	70	30	0,7	60800

RECYFIX®
PRO

RECYFIX®
PLUS

RECYFIX®
STANDARD

DACHFIX®

Slotted Channel

FASERFIX®
STANDARD

RECYFIX®POINT
FASERFIX®POINT


RECYFIX®
GREEN

LINEFIX®

DACHFIX®STANDARD

DACHFIX®STANDARD Channels Type 1, galvanised, height adjustable

Type 1 DP, with slotted grating SW 9

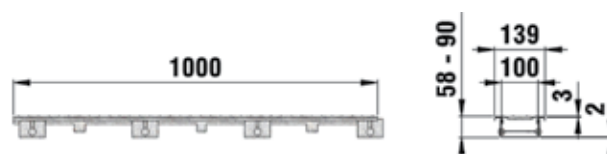


	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Type 1 DP, with slotted grating SW 9	1000	139	58 - 90	-	280	4,7	60070
Type 1 DP, with mesh grating MW 30/10	1000	139	58 - 90	-	650	6,6	60080
Type 1 DP, with perforated grating diam. 6	1000	139	58 - 90	-	161	5,6	60078

DACHFIX Channels are walkable and wheelchair passable.

All DACHFIX STANDARD channels are also available as tailor-made solutions in stainless steel CNS 1.4301, but with longer delivery times.

DACHFIX®STANDARD Channels Type 2, galvanised, height adjustable

Type 2 DP, with slotted grating SW 9

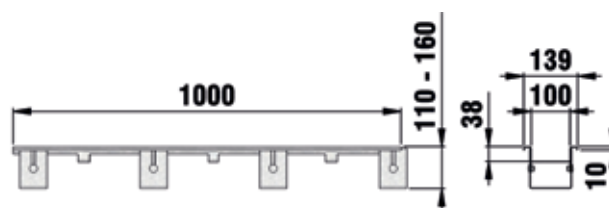

	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Type 2 DP, with slotted grating SW 9	1000	139	110 - 160	-	280	5,3	60170
Type 2 DP, with mesh grating MW 30/10	1000	139	110 - 160	-	650	7,2	60180
Type 2 DP, with perforated grating diam. 6	1000	139	110 - 160	-	161	8,7	60178


DACHFIX Channels are walkable and wheelchair passable.

All DACHFIX STANDARD channels are also available as tailor-made solutions in stainless steel CNS 1.4301, but with longer delivery times.

DACHFIX®STANDARD

DACHFIX®STANDARD Channels Type 3, galvanised, height adjustable

Type 3 DP, with mesh grating
MW 30/10

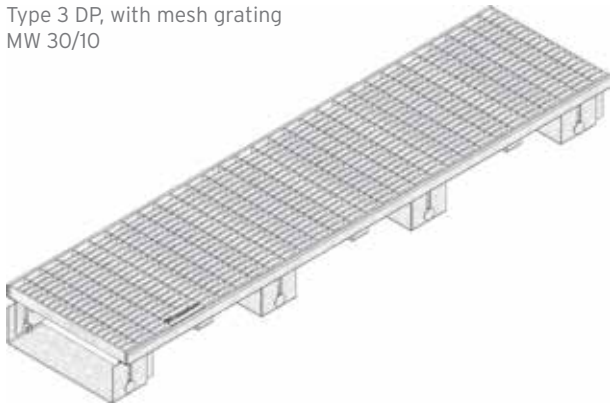


	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Type 3 DP, with mesh grating MW 30/10	1000	252	90 - 130	-	1966	9,2	60280

DACHFIX Channels are walkable and wheelchair passable.

All DACHFIX STANDARD channels are also available as tailor-made solutions in stainless steel CNS 1.4301, but with longer delivery times.

DACHFIX®STANDARD, Accessories

Perforated side wall,
galvanised, for Type 2

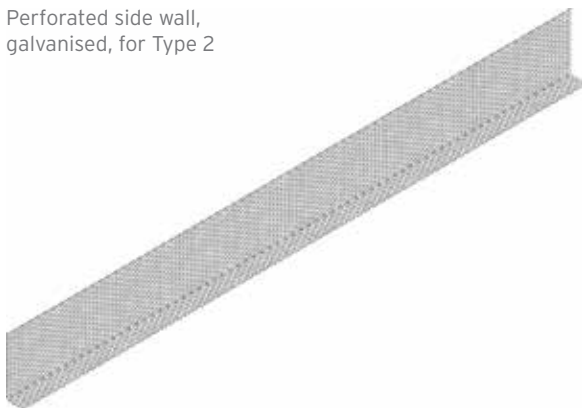

Cross-intersection channel,
galvanised



	Length mm	Width mm	Height mm	Weight kg	Item No.
Perforated side wall, galvanised, for Type 1	1000	29	50	0,3	60700
Perforated side wall, galvanised, for Type 2	1000	27	100	0,4	60721
Perforated side wall, galvanised, for Type 3/4	1000	32	70	0,6	60741
Cross-intersection channel, galvanised	1000	70	30	0,7	60800

DACHFIX Channels are walkable and wheelchair passable.

All DACHFIX STANDARD channels are also available as tailor-made solutions in stainless steel CNS 1.4301, but with longer delivery times.

RECYFIX®
PRO

RECYFIX®
PLUS

RECYFIX®
STANDARD

DACHFIX®

Slotted Channel

FASERFIX®
STANDARD

RECYFIX®POINT
FASERFIX®POINT



RECYFIX®
GREEN

LINEFIX®

DACHFIX®POINT

DACHFIX®POINT Type 1, height 60 mm, 250 x 250 mm

Gully extension Type 1 with slotted grating, galvanised

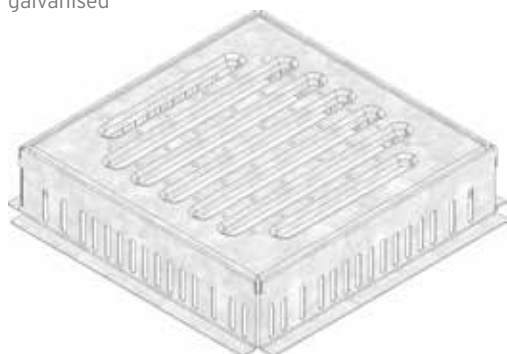



	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Gully extension Type 1 with slotted grating, galvanised	250	250	60	-	116	1,7	60620
Gully extension Type 1 with mesh grating, MW 30/10, galvanised	250	250	60	-	398	1,4	60610

DACHFIX POINT gullies are walkable and wheelchair passable.

All DACHFIX STANDARD channels are also available as tailor-made solutions in stainless steel CNS 1.4301, but with longer delivery times.

DACHFIX®POINT Type 2, height 60 mm, 400 x 400 mm

Gully extension Type 2 with mesh grating MW 30/10, galvanised

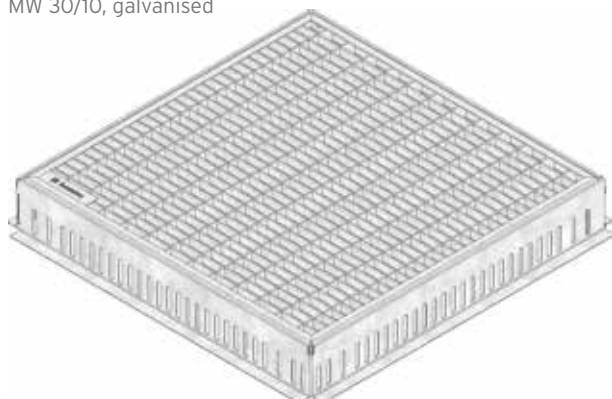

	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Gully extension Type 2 with mesh grating MW 30/10, galvanised	400	400	60	-	1069	5,7	60640


DACHFIX POINT gullies are walkable and wheelchair passable.

All DACHFIX STANDARD channels are also available as tailor-made solutions in stainless steel CNS 1.4301, but with longer delivery times.

DACHFIX®POINT

DACHFIX®POINT Type 1, height adjustable, 250 x 250 mm

Gully extension Type 1 with slotted grating, galvanised

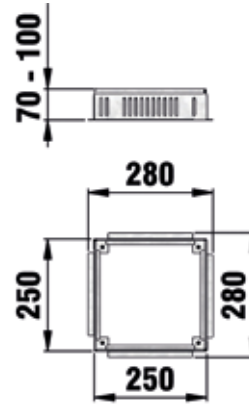



	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Gully extension Type 1 with slotted grating, galvanised	250	250	70 - 100	-	116	4,3	60542
Gully extension Type 1 with mesh grating, MW 30/10, galvanised	250	250	70 - 100	-	398	4,0	60541

DACHFIX POINT gullies are walkable and wheelchair passable.

All DACHFIX STANDARD channels are also available as tailor-made solutions in stainless steel CNS 1.4301, but with longer delivery times.

DACHFIX®POINT Type 1, height adjustable, 400 x 400 mm

Gully extension Type 2 with mesh grating, MW 30/10, galvanised

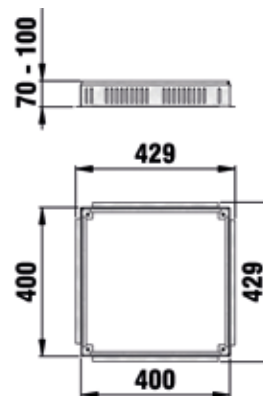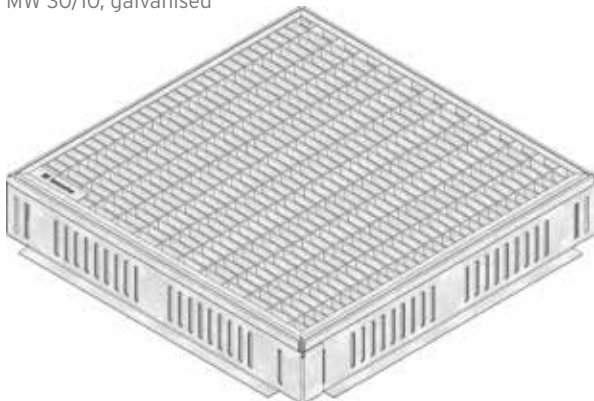

	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Gully extension Type 2 with mesh grating, MW 30/10, galvanised	400	400	70 - 100	-	1069	7,2	60591

DACHFIX POINT gullies are walkable and wheelchair passable.

All DACHFIX STANDARD channels are also available as tailor-made solutions in stainless steel CNS 1.4301, but with longer delivery times.

RECYFIX®
PRO

RECYFIX®
PLUS

RECYFIX®
STANDARD

DACHFIX®

Slotted Channel

FASERFIX®
STANDARD

RECYFIX®POINT
FASERFIX®POINT

RECYFIX®
GREEN

LINEFIX®