

RECYFIX® PRO

Corrosion-free drainage system for private and public areas.





RECYFIX®PRO

Corrosion-free drainage system for private and public areas.

1 Requirements

Drainage channels for optically attractive areas have to

- be modern and unique in its design.
- be extremely stable to guarantee long-term and permanent security.
- be resistant to environmental influences (frost, heat and moisture).
- be dimensioned for high loading categories.
- be designed in accordance with DIN EN 1433.

3 Solutions

Therefore RECYFIX PRO Channels are suitable for the drainage of sophisticated areas:

- channel and angle housing made of recycled high-grade plastic
- secure and corrosion-free grating support
- loading capacity up to C 250
- hydraulically optimized FIBRETEC Slotted grating

2 Application areas

- private and public areas
- squares and parks
- railway platform
- driveways and parking lots
- reduced trafficked areas



100% corrosion-free, especially with frost and de-icing salt



Railway plattform in Limburg, Germany



Horse stables in Newmarket, UK



Private house in Wiehl, Germany



Residential complex in Munich, Germany

RECYFIX®
PRO

RECYFIX®
PLUS

RECYFIX®
STANDARD

DACHFIX®

Slotted Channel

FASERFIX®
STANDARD


RECYFIX®POINT
FASERFIX®POINT

RECYFIX®
GREEN

LINEFIX®

The benefits of **RECYFIX®** PRO Channels

100% corrosion-free



Pre-assembled ready for installation

- channel and grating = one part
 - no spare parts
 - easy handling on stock and construction site
 - cost-efficient transport
- = better gross margin**




Angle housing

- PE-angle housing acc. EN 1433
 - Ridges to stop any lateral movement
 - inlaying gratings
- = security**



Low weight ensures easy handling on site


- much lighter than channels made of polymere concrete
 - easy transport and installation
- = cost savings**



Corrosion-free gratings

- high-grade plastic
- FIBRETEC Slotted grating: anti-slippery surface, hydraulically optimized with elegant inlet slots
- GUGI-Mesh grating

= flexibility / security



High resistance

- high resistance against frost, de-icing salt and UV rays
- withstands high temperature differences


= durability



Award-winning design

- FIBRETEC Slotted gratings honoured with Focus Open Design Award
- nomination for German design prize

= high quality work



High-grade material

- RECYFIX - stable and unbreakable
- elastic and especially robust material
- withstands in daily use high loadings and temperature differences

= security

RECYFIX®
PRO

RECYFIX®
PLUS

RECYFIX®
STANDARD

DACHFIX®

Slotted Channel

FASERFIX®
STANDARD

RECYFIX®POINT
FASERFIX®POINT

RECYFIX®
GREEN

LINEFIX®

RECYFIX®PRO

Corrosion-free drainage system for private and public areas.

The large areas of the Westfalenpark grounds are drained with RECYFIX®PRO and other HAURATON channels.

RECYFIX®PRO

Drainage system for one of Europe's largest urban parks. RECYFIX PRO offers security and reduces costs.

The Westfalenpark is the green heart of the Westphalian city of Dortmund and, with its 70 hectares, it is one of the largest inner city parks in Europe. It is a popular destination for leisure and recreation in North Rhine-Westphalia and, in addition to numerous leisure and play facilities, features extensive water surfaces and a stage on the lake for cultural events and garden shows. The most notable building is the Florian tower - a 220 metre-high television and viewing tower, which is considered Dortmund's best-known building.

Benefits for Dortmund municipality:

- Safety
 - load class C 250 for in-park traffic
 - PA grating without sharp edges and burrs suitable for public areas
 - slot width suitable for pedestrians
- Cost reduction
 - corrosion-free = maintenance-free
 - simple to service
 - long service life and sustainable
 - attractive, durable design



Westfalenpark in Dortmund, Germany

■ Benefits for the landscape architect:

Reliable in design and material

- durable and reliable drainage system
- complies with all standards
- innovative and award-winning

■ Benefits for the installer:

Reduced installation cost and easy installation

- low weight
- simple installation, easy to cut (cutting to length, mitre cuts)
- easy transport to site



RECYFIX®
PRO

RECYFIX®
PLUS

RECYFIX®
STANDARD

DACHFIX®

Slotted Channel

FASERFIX®
STANDARD

RECYFIX®POINT
FASERFIX®POINT

RECYFIX®
GREEN

LINEFIX®

RECYFIX®PRO

Corrosion-free drainage system for private and public areas.

RECYFIX PRO channels meet the requirements of DIN EN 1433 and are suitable for the following load categories:



Category B 125, Load class 125 kN

Sidewalks, pedestrian areas and comparable areas, car parks or car parking decks.




Category C 250, Load class 250 kN

Sidewalk channel areas and untraveled side panels or similar



In case of doubt, the higher category should be used.

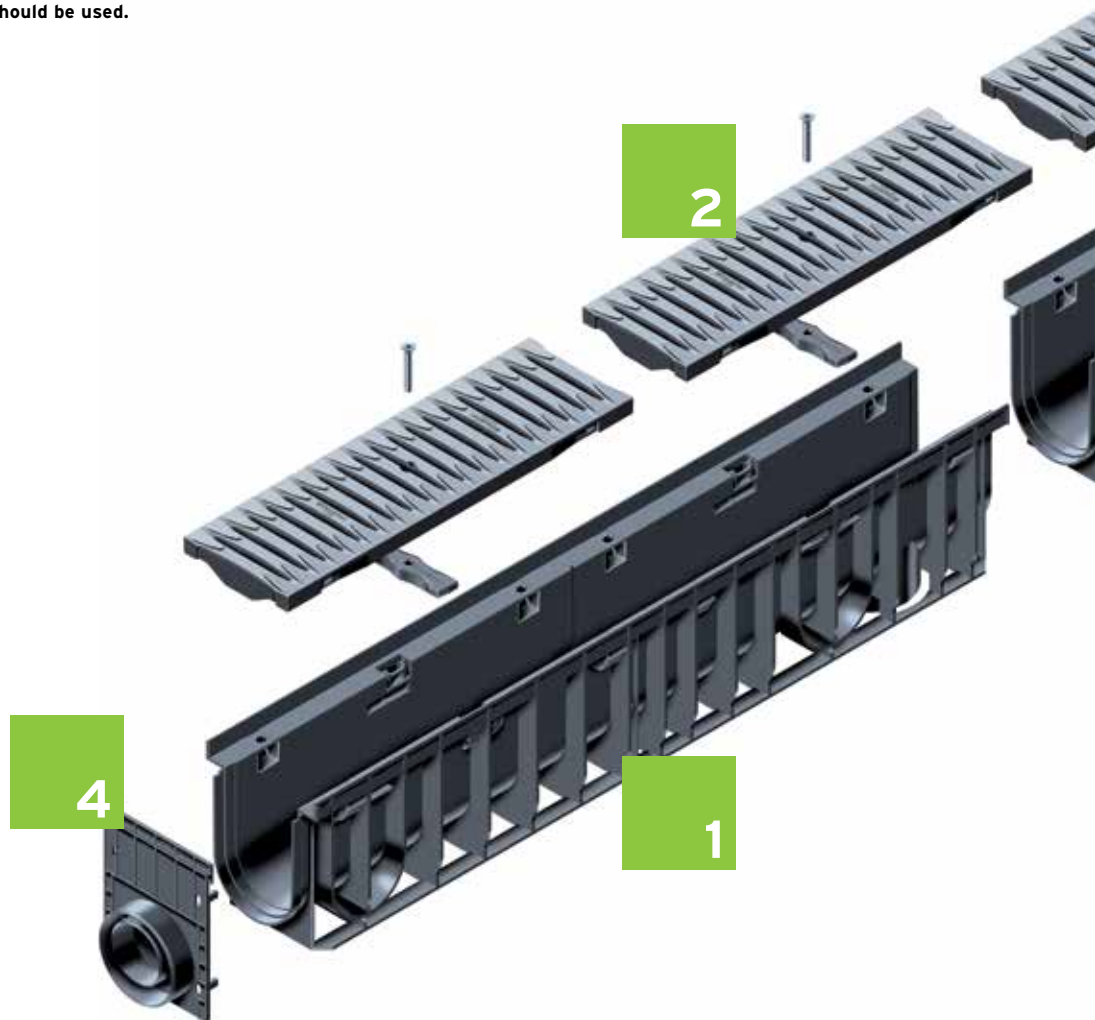

Grating options RECYFIX PRO Channels

GUGI-Mesh
grating made
of PA*



FIBRETEC
Slotted grating*



Longitudinal
ductile iron
grating



Load categories
acc. DIN EN 1433

B 125

100


150, 200

C 250

100

100

*sizes are nominal widths

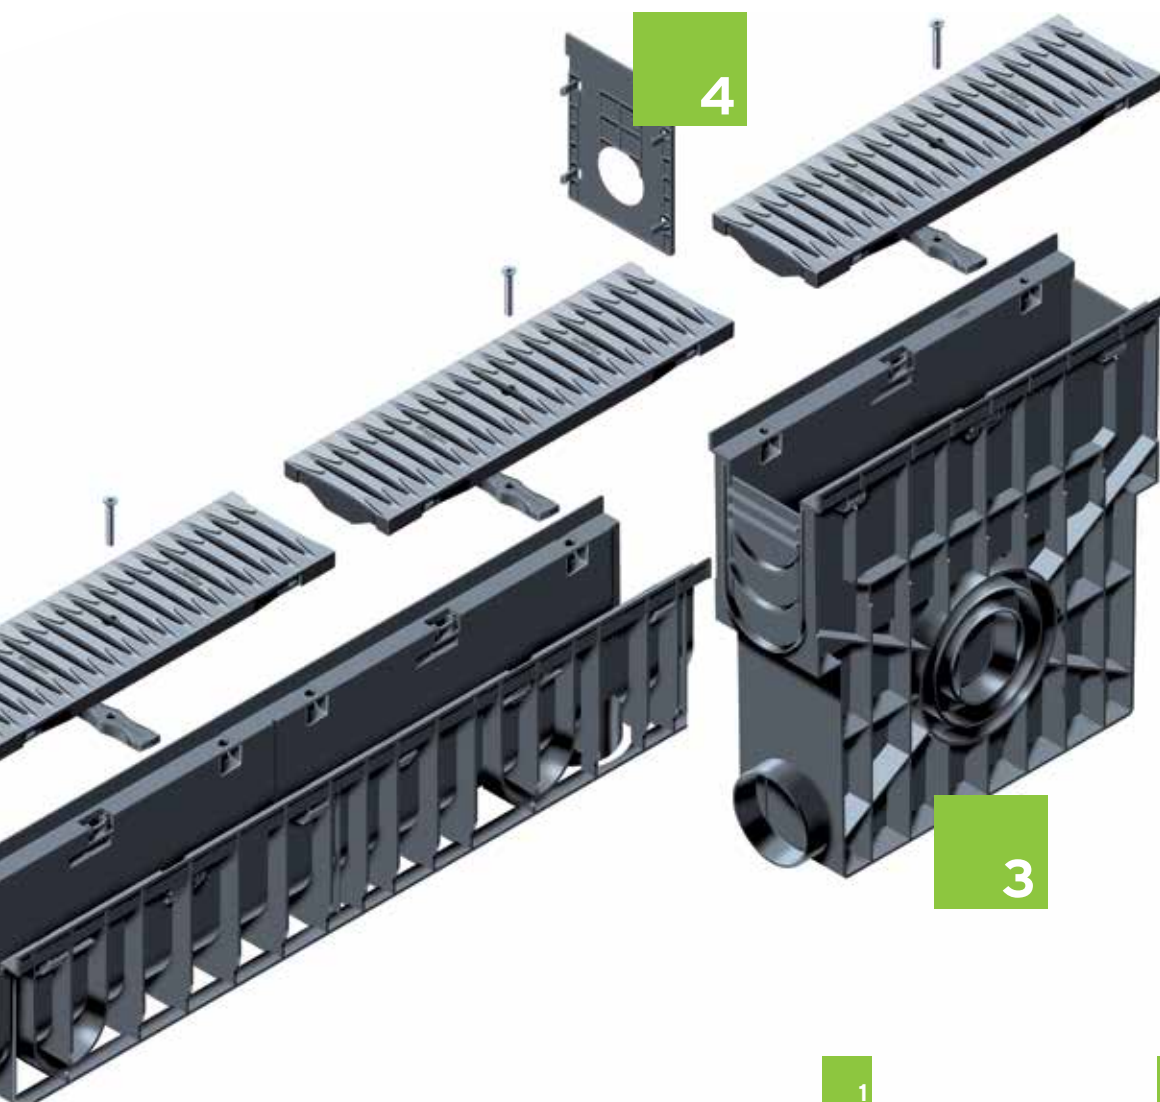

1

■ Channels made of PE-PP with integrated angle housing, according to DIN EN 1433, with sleeve and feather connection for exact installation

2

■ Different grating options, i.e. FIBRETEC Slotted grating

3

■ Trash box with different pipe connection possibilities

4

■ End caps with or without outlet

RECYFIX®
PRO

RECYFIX®
PLUS

RECYFIX®
STANDARD

DACHFIX®

Slotted Channel

FASERFIX®
STANDARD

RECYFIX®POINT
FASERFIX®POINT

RECYFIX®
GREEN

LINEFIX®

Your way to the tender text on **hauraton.com**

1 a) Product known

- Go to the product page.



b) Product unknown

- Go to the specification tool.



- choose application
- choose field of application, loading capacity and nominal size
- select from the proposed systems / items

2 Choose required format and add it to your documents



3 Download tender text

- Go to „My documents“.




LINEFIX®	RECYFIX® GREEN	RECYFIX®POINT FASERFIX®POINT	FASERFIX® STANDARD	Slotted Channel	DACHFIX®	RECYFIX® STANDARD	RECYFIX® PLUS	RECYFIX® PRO
----------	-------------------	---------------------------------	-----------------------	-----------------	----------	----------------------	------------------	-----------------

RECYFIX®PRO 100

RECYFIX®PRO 100 - combi article, class B 125

Type 01 with GUGI-Grating made of PA-GF, MW 15/25, black

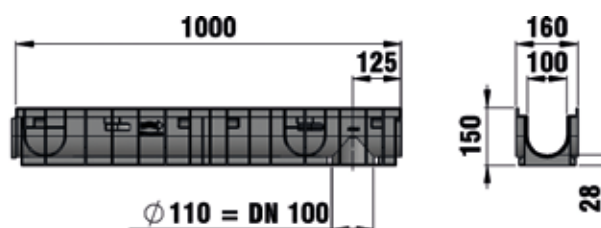


	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Type 01 with GUGI-Grating made of PA-GF, MW 15/25, black	1000	160	150	92	444	4,1	47035
Type 010 with GUGI-Grating made of PA-GF, MW 15/25, black	1000	160	200	142	444	4,7	47040
Type 0105 with GUGI-Grating made of PA-GF, MW 15/25, black	500	160	150	92	444	2,1	47036
Type 01005 with GUGI-Grating made of PA-GF, MW 15/25, black	500	160	200	142	444	2,5	47041
Type 75 with GUGI-Grating made of PA-GF, MW 15/25, black	1000	160	75	25	444	2,9	47032
Type 95 with GUGI-Grating made of PA-GF, MW 15/25, black	1000	160	95	55	444	3,6	47033

RECYFIX® PRO 100

RECYFIX® PRO 100 - combi article, class C 250

Type 010 with FIBRETEC slotted grating, SW 9, black

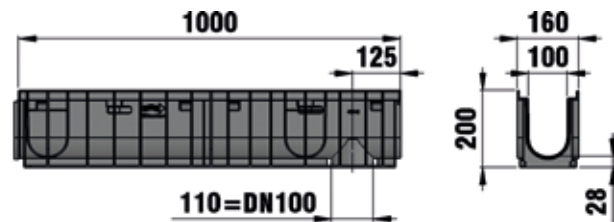

Type 010 with ductile longitudinal grating, KTL, locked




	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Type 01 with FIBRETEC slotted grating, SW 9, black	1000	160	150	92	372	4,5	47055
Type 010 with FIBRETEC slotted grating, SW 9, black	1000	160	200	142	372	4,9	47060
Type 0105 with FIBRETEC slotted grating, SW 9, black	500	160	150	92	372	2,3	47056
Type 01005 with FIBRETEC slotted grating, SW 9, black	500	160	200	142	372	2,5	47061
Type 75 with FIBRETEC slotted grating, SW 9, black	1000	160	75	25	372	3,4	47062
Type 95 with FIBRETEC slotted grating, SW 9, black	1000	160	95	55	372	3,7	47063
NEW Type 01 with ductile longitudinal grating, KTL, locked	1000	160	150	92	528	10,4	48634
NEW Type 010 with ductile longitudinal grating, KTL, locked	1000	160	200	142	528	11,1	48645
NEW Type 0105 with ductile longitudinal grating, KTL, locked	500	160	150	92	528	5,2	48635
NEW Type 01005 with ductile longitudinal grating, KTL, locked	500	160	200	142	528	5,6	48646
NEW Type 75 with ductile longitudinal grating, KTL, locked	1000	160	75	25	528	9,5	47038
NEW Type 95 with ductile longitudinal grating, KTL, locked	1000	160	95	55	528	10,0	47039

RECYFIX®PRO 100

RECYFIX®PRO 100 - Accessories



Trash box with galvanised mud bucket and GUGI-Grating made of PA-GF, MW 15/25, black

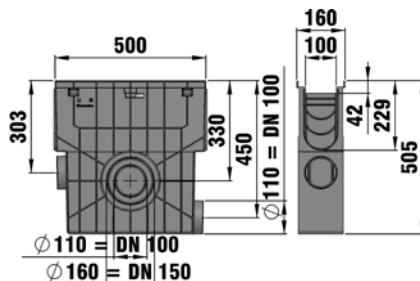

Foul air trap for RECYFIX trash box 100



Foul air trap, vertical, DN 100



End cap closed for type 01



End cap closed for type 010

	Length mm	Width mm	Height mm	Weight kg	Item No.
Trash box with galvanised mud bucket and GUGI-Grating made of PA-GF, MW 15/25, black	500	160	505	5,9	47053
Trash box with mud bucket and FIBRETEC slotted grating, SW 9, black	500	160	505	5,9	47054
NEW Trash box with PE mud bucket and with ductile longitudinal grating, KTL, cl. C 250, locked	500	160	505	8,1	48655
Foul air trap for RECYFIX trash box 100	-	-	-	0,1	967
Foul air trap, vertical, DN 100	-	-	-	0,6	40295
Foul air trap set, vertical DN 100 for RECYFIX 100	-	-	-	0,4	40294
Mud bucket vertical DN 100, black	-	-	-	0,1	40293
End cap closed for type 01	5	160	124	0,1	48681
End cap made of PE-PP with outlet DN 100 for type 01	29	160	201	0,1	48691
End cap closed for type 010	5	160	176	0,1	47082
End cap made of PE-PP with outlet DN 100 for type 010	34	160	201	0,1	47093
End cap Type 75	-	160	70	0,1	47097
End cap Type 95	4	160	81	0,1	47098
Sealing material Sikaflex TS Fast, 600 ml, tubular bag, black	-	-	-	0,6	6890
Tubular pistol for Sikaflex TS Fast	-	-	-	1,3	6891


RECYFIX®PRO 100

LINEFIX®	RECYFIX® GREEN	RECYFIX®POINT FASERFIX®POINT	FASERFIX® STANDARD	Slotted Channel	DACHFIX®	RECYFIX® STANDARD	RECYFIX® PLUS	RECYFIX® PRO
----------	-------------------	---------------------------------	-----------------------	-----------------	----------	----------------------	------------------	-----------------

RECYFIX®PRO 150 **NEW**

RECYFIX®PRO 150 - Combined article, class B 125

Type 01 with FIBRETEC Slotted grating, SW 9 mm, black, locked

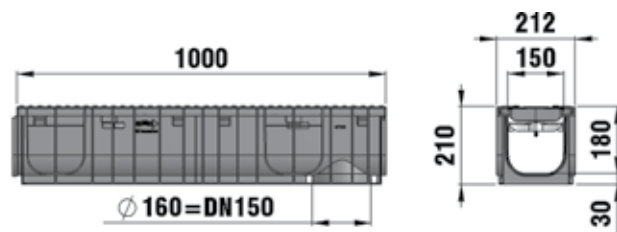



	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Type 01 with FIBRETEC Slotted grating, SW 9 mm, black, locked	1000	212	210	230	500	7,4	47135
Type 0105 with FIBRETEC Slotted grating, SW 9 mm, black, locked	500	212	210	230	500	3,7	47136
Type 115 with FIBRETEC Slotted grating, SW 9 mm, black, locked	1000	212	115	116	500	6,1	47133

RECYFIX® PRO 150 **NEW**

RECYFIX® PRO 150 - Accessories



Trash box with galvanised mud bucket and FIBRETEC Slotted grating, black, SW 9 mm, cl. B 125, locked



End cap closed, type 115




End cap combined, PE-PP with outlet DN 70/100 for type 01

	Length mm	Width mm	Height mm	Weight kg	Item No.
Trash box with galvanised mud bucket and FIBRETEC Slotted grating, black, SW 9 mm, cl. B 125, locked	500	212	518	18,7	47153
Foul air trap DN 150	-	-	-	2,0	960
Mud bucket vertical DN 100, black	-	-	-	0,1	40293
End cap closed, type 115	-	-	-	0,1	47197
End cap combined, PE-PP with outlet DN 70/100 for type 01	24	210	218	0,2	40591
Sealing material Sikaflex TS Fast, 600 ml, tubular bag, black	-	-	-	0,6	6890
Tubular pistol for Sikaflex TS Fast	-	-	-	1,3	6891
Holesaw, Ø 102 mm, with tool holder for a drill	-	-	-	0,6	980

RECYFIX®PRO 200

RECYFIX®PRO 200 - combi article, class B 125


Type 115 with FIBRETEC Slotted grating, SW 9 mm, black, locked

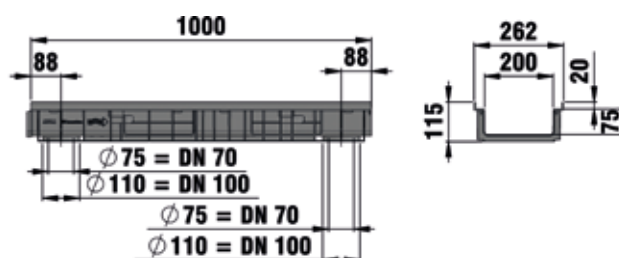

	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Type 010 with FIBRETEC Slotted grating, SW 9 mm, black, locked	1000	262	201	290	656	8,3	47246
Type 115 with FIBRETEC Slotted grating, SW 9 mm, black, locked	1000	262	115	150	656	7,0	47233

RECYFIX®PRO 200 - Combi article, class D 400

Type 010 with G-TEC grating, KTL-coated, locked

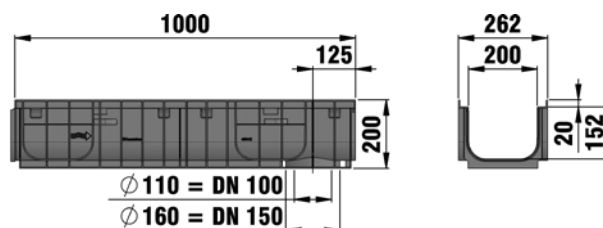



	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Type 010 with G-TEC grating, KTL-coated, locked	1000	262	201	290	595	20,6	47245
Type 115 with G-TEC grating, KTL-coated, locked	1000	262	115	150	595	19,3	47232

RECYFIX®PRO 200

RECYFIX®PRO 200 - Accessories



Trash box with galvanised mud bucket and FIBRETEC Slotted grating, black, cl. B 125, locked



End cap closed, type 115



Foul air trap, vertical, DN 100

	Length mm	Width mm	Height mm	Weight kg	Item No.
Trash box with galvanised mud bucket and FIBRETEC Slotted grating, black, cl. B 125, locked	500	262	752	29,2	47253
Trash box with galvanised mud bucket and G-TEC Ductile iron grating, black, cl. D 400, locked	500	262	752	35,4	47255
End cap combined, PE-PP with outlet DN 70/100 for type 010	28	258	217	0,7	41387
End cap closed, type 115	-	260	115	0,1	47297
Foul air trap, vertical, DN 100	-	-	-	0,6	40295
Foul air trap DN 100, outside	-	-	-	0,4	961
Foul air trap DN 150	-	-	-	2,0	960
Sealing material Sikaflex TS Fast, 600 ml, tubular bag, black	-	-	-	0,6	6890
Tubular pistol for Sikaflex TS Fast	-	-	-	1,3	6891
Holesaw, Ø 102 mm, with tool holder for a drill	-	-	-	0,6	980

DACHFIX®

Reliable water retention system for terraces, façades and flat roofs.





DACHFIX®

Reliable water retention system for terraces, façades and flat roofs.

1 Requirements

- fast and reliable removal of surface water on facades, flat roofs and terraces
- compliance with the guidelines and the flat roof relevant DIN standards
- backwater reserve for sudden accumulation of rainwater

2 Application areas

- flat roof green areas
- passable roof areas and terraces
- facade channels
- in front of entrances of balconies and terraces

3 Solution

- powerful backwater reserve for abruptly accumulated water quantities
- horizontal and vertical drainage
- effective protection of walls, doors and windows elements
- open channel systems: channel bodies have drainage possibility on all sides
- barrier-free transitions on terraces
- easy assembling kit



EUROPA SHOPPING CENTRE in Bystrica, Slovakia



Holiday Inn in Bydgoszcz, Poland



Kopernikus School in Nuremberg, Germany



Leonardo Royal Hotel in Munich, Germany



Penthouse in Wiehl, Germany



RECYFIX® PRO	RECYFIX® PLUS	RECYFIX® STANDARD	DACHFIX®	Slotted Channel	FASERFIX® STANDARD	RECYFIX®POINT FASERFIX®POINT	RECYFIX® GREEN	LINEFIX®
-----------------	------------------	----------------------	----------	-----------------	-----------------------	---------------------------------	-------------------	----------

The benefits of **DACHFIX®** Channels



Individual Solutions

- Guidelines for the preparation of corner pieces
- optional height adjustment
- Double rip for the preparation of full 0.5 m pieces
- big length for efficient installation

= **flexibility**



Durability

- DACHFIX Channels withstand all weather influences
- permanently corrosion-resistant (DACHFIX RESIST)



= **security**



Quick installation

- easy to handle
- Tongue and groove system for straight installation

= **cost reduction**

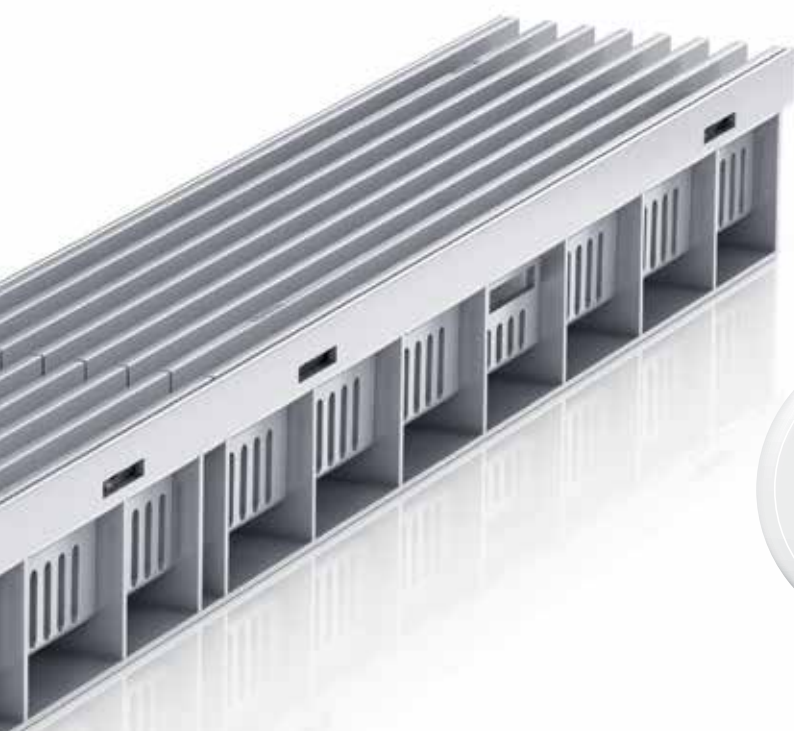

Various grating options

■ in the materials: PE, galvanised steel, stainless steel

= **flexibility**



High resistance

- high resistance against frost, de-icing salt and waterlogging
- DACHFIX Channels withstand all weather conditions
- permanent corrosion resistance (DACHFIX RESIST)

= **durability**

RECYFIX®
PRO

RECYFIX®
PLUS

RECYFIX®
STANDARD

DACHFIX®

Slotted Channel

FASERFIX®
STANDARD

RECYFIX®POINT
FASERFIX®POINT

RECYFIX®
GREEN

LINEFIX®

DACHFIX®

Reliable water retention system for terraces, façades and flat roofs.

Modern residential development featuring corrosion-free and durable DACHFIX drainage system

Durable and corrosion-free:

Façade and terrace drainage with DACHFIX RESIST.

In Sindelfingen in Swabia, a new state-of-the-art project is being developed in a central location. The idea is that the development, with its 40 residential units ranging from exclusive penthouses to owner-occupied apartments, terraced and semi-detached houses through to sheltered housing for the elderly, will provide housing for a mix of age-groups living together. In line with the high-quality interior specification and the attractive architectural design, all materials - including those for the façade and terrace drainage - are reliable and durable.

DACHFIX RESIST features:

- channels and gratings made of high-quality PE - 100% corrosion-free
- long service life even under permanently wet conditions on roof terraces
- PE longitudinal grating in an attractive and elegant silver-grey design
- very suitable for contact with bare feet at terrace doors
- highly reduced installation costs due to easy installation and low weight



**Housing estate in Sindelfingen,
Germany**



**RECYFIX®
PRO**

**RECYFIX®
PLUS**

**RECYFIX®
STANDARD**

DACHFIX®

Slotted Channel

**FASERFIX®
STANDARD**

**RECYFIX®POINT
FASERFIX®POINT**


**RECYFIX®
GREEN**


LINEFIX®

DACHFIX®

Reliable water retention system for terraces, façades and flat roofs.

DACHFIX Channels comply with the flat roof guidelines and are walkable and wheelchair accessible.

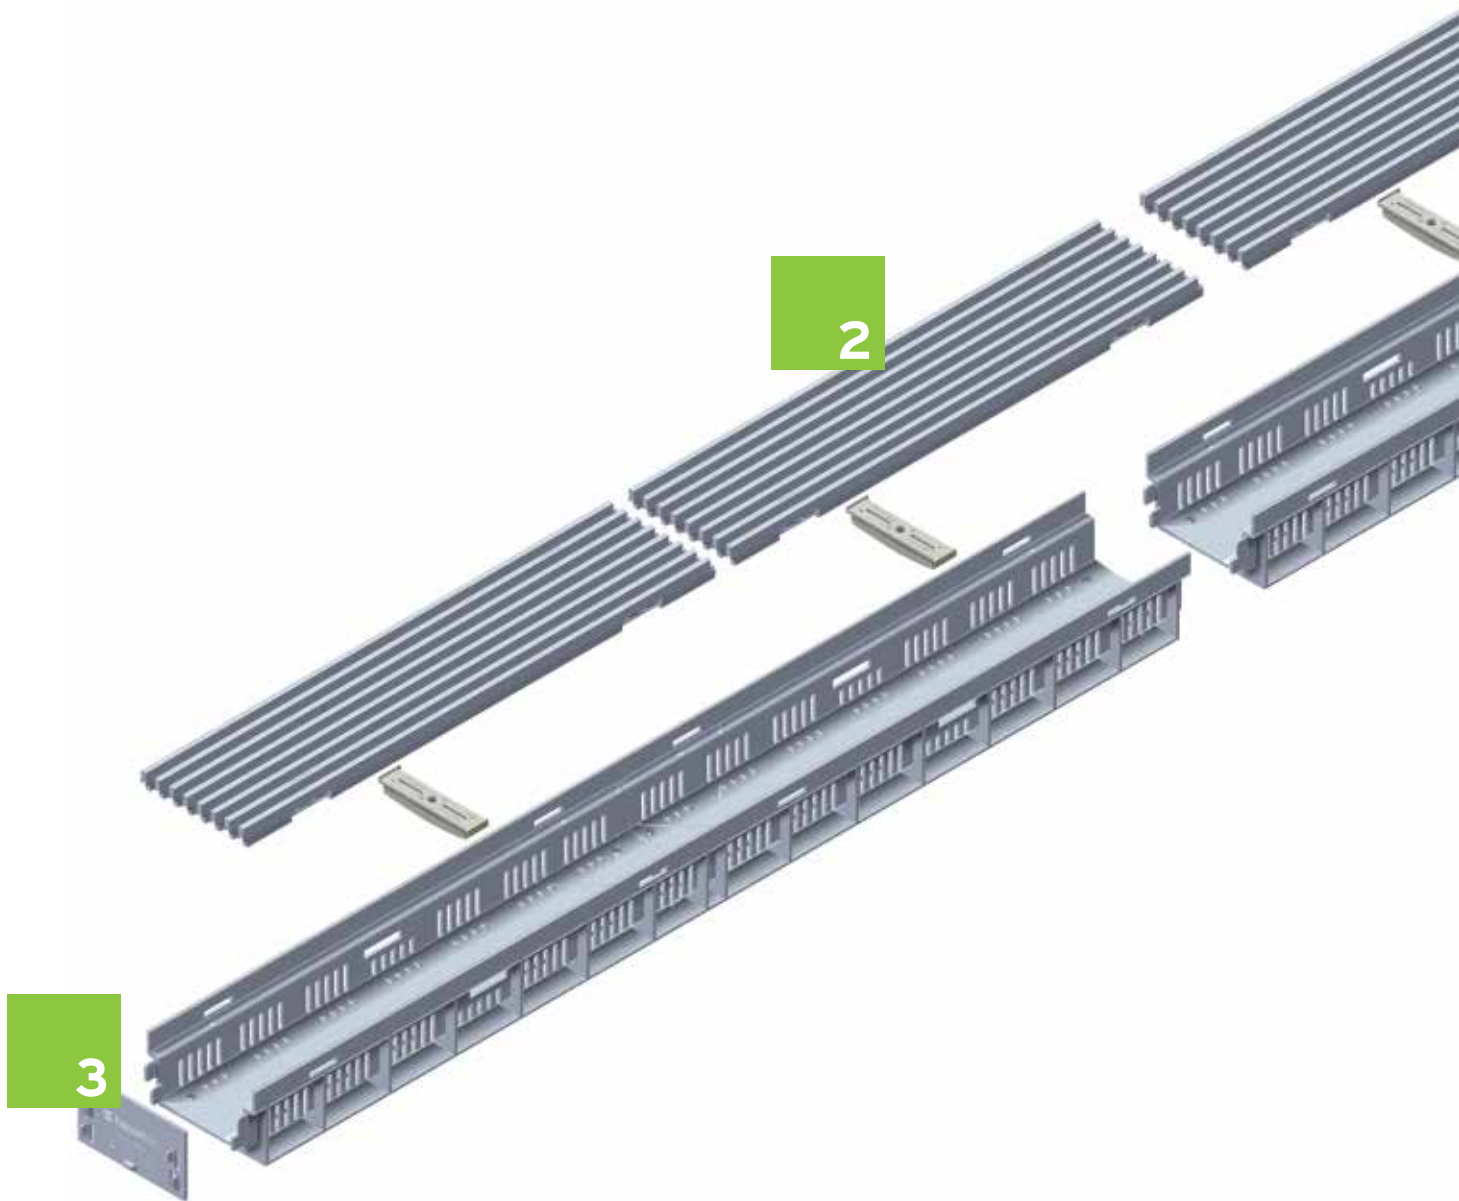

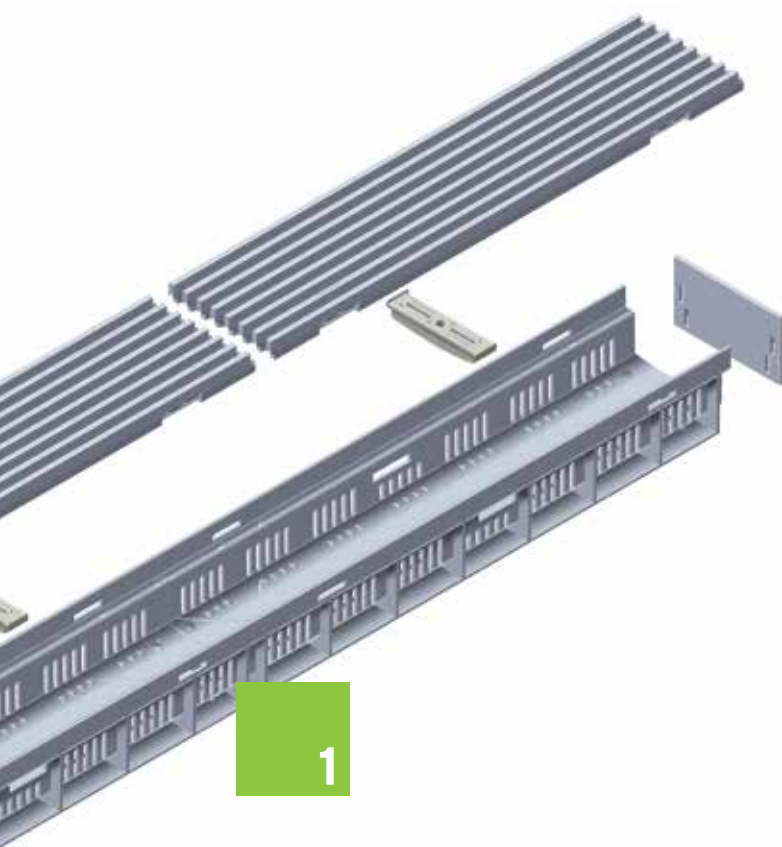

1

1

■ Corrosion-free channels made of high quality PP with a fix height, height adjustment optional


3

■ PE end caps

2

■ High quality gratings:

- PE longitudinal grating in silver
- PE mesh gratings
- Slotted- and mesh gratings made of galvanised or stainless steel

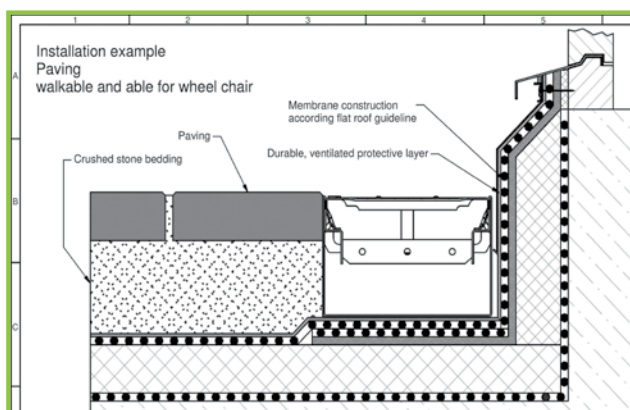

DACHFIX Channels allow a barrier-free access on roof terraces. A height difference of 15 cm between doors or windows elements and sealing level, as prescribed in the flat roof guideline, is not required.

RECYFIX®
PRO

RECYFIX®
PLUS

RECYFIX®
STANDARD

DACHFIX®

Slotted Channel

FASERFIX®
STANDARD

RECYFIX®POINT
FASERFIX®POINT

RECYFIX®
GREEN

LINEFIX®

Your way to the tender text on **hauraton.com**

1 a) Product known

- Go to the product page.



b) Product unknown

- Go to the specification tool.



- choose application
- choose field of application, loading capacity and nominal size
- select from the proposed systems / items

2 Choose required format and add it to your documents



3 Download tender text

- Go to „My documents“.





LINEFIX®	RECYFIX® GREEN	RECYFIX®POINT FASERFIX®POINT	FASERFIX® STANDARD	Slotted Channel	DACHFIX®	RECYFIX® STANDARD	RECYFIX® PLUS	RECYFIX® PRO
----------	-------------------	---------------------------------	-----------------------	-----------------	----------	----------------------	------------------	-----------------

DACHFIX®RESIST

DACHFIX®RESIST Channels made of PE-PP, height 45 mm

Type 45 with longitudinal slotted grating made of PE-PP, silver

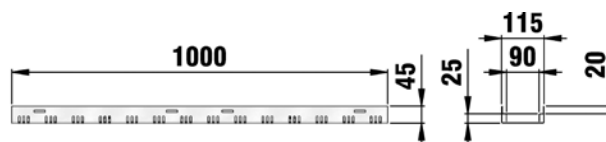
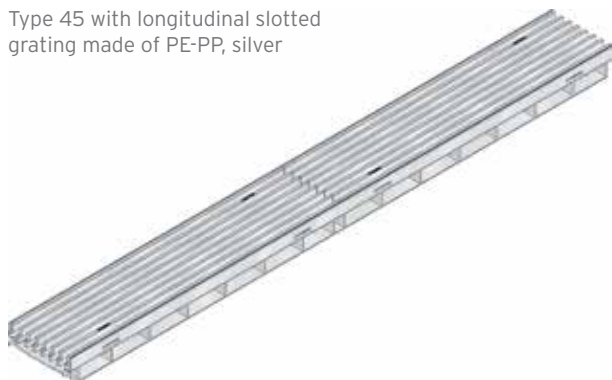


	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Type 45 with longitudinal slotted grating made of PE-PP, silver	1000	115	45	-	637	1,5	63115
NEW Type 45 with longitudinal grating, galvanised	1000	115	45	-	-	4,0	63166
NEW Type 45 with longitudinal grating, stainless steel	1000	115	45	-	-	4,0	63167
Type 45 with mesh grating, PE-PP, silver, MW 8/21	1000	115	45	-	437	1,4	63145
Type 45 with mesh grating, PE-PP, black, MW 8/21	1000	115	45	-	250	1,4	63140
Type 45 with slotted grating galvanised, SW 80/9	1000	115	45	-	256	1,8	63130
Type 45 with slotted grating stainless steel, SW 80/9	1000	115	45	-	256	1,7	63135
Type 45 with mesh grating, galvanised, MW 30/10	1000	115	45	-	828	3,0	63150
Type 45 with mesh grating, stainless steel, MW 8/21	1000	115	45	-	828	2,7	63155
NEW Type 45 with perforated grating, diam. 6 mm, galvanised	1000	115	45	-	-	2,6	63168
NEW Type 45 with perforated grating, diam. 6 mm, stainless steel	1000	115	45	-	-	2,6	63169

DACHFIX®RESIST

DACHFIX®RESIST Channels made of PE-PP, height 75 mm

Type 75 with longitudinal grating, galvanised

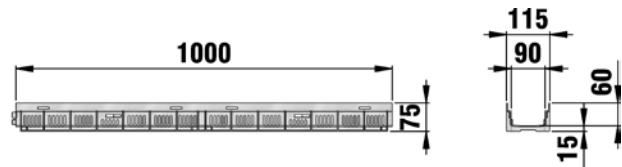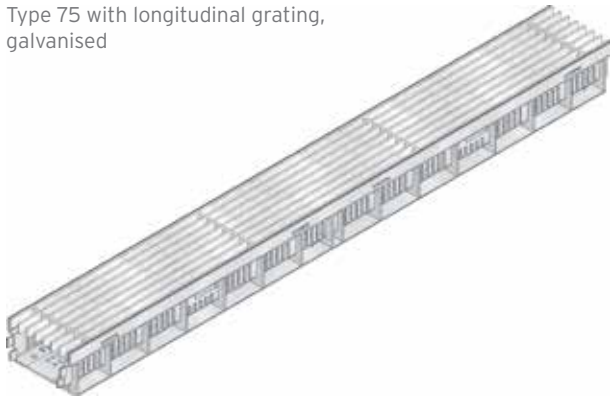

	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Type 75 with longitudinal slot grating, SW 10 mm, made of PE-PP, silver	1000	115	75	28	637	1,6	63015
NEW Type 75 with longitudinal grating, galvanised	1000	115	75	28	-	4,1	63066
NEW Type 75 with longitudinal grating, stainless steel	1000	115	75	28	-	4,1	63067
Type 75 with mesh grating made of PE-PP, silver	1000	115	75	28	511	1,6	63045
Type 75 with mesh grating made of PE-PP, black	1000	115	75	28	250	1,6	63040
Type 75 with slotted grating, galvanised	1000	115	75	28	256	2,9	63030
Type 75 with slotted grating, stainless steel	1000	115	75	28	256	3,1	63035
Type 75 with mesh grating MW 30'/10, galvanised	1000	115	75	28	828	3,3	63050
Type 75 with mesh grating MW 30'/10, stainless steel	1000	115	75	28	828	3,0	63055
NEW Type 75 with perforated grating, diam. 6 mm, galvanised	1000	115	75	28	-	2,7	63068
NEW Type 75 with perforated grating, diam. 6 mm, stainless steel	1000	115	75	28	-	2,7	63069

DACHFIX Channels are walkable and wheelchair passable.
The quality of stainless steel material corresponds to CNS 1.4301.
Fixing of mesh gratings with bolts possible.

RECYFIX®
PRO

RECYFIX®
PLUS

RECYFIX®
STANDARD

DACHFIX®

Slotted Channel

FASERFIX®
STANDARD

RECYFIX®POINT
FASERFIX®POINT

RECYFIX®
GREEN

LINEFIX®

DACHFIX®RESIST

DACHFIX®RESIST, Accessories



End cap made of PE-PP for DACHFIX RESIST Type 45



End cap closed, silver, for DACHFIX RESIST Type 75



PE-PP locking handle, silver, for DACHFIX RESIST



Height adjusting set for DACHFIX RESIST, height 75 mm

	Length mm	Width mm	Height mm	Weight kg	Item No.
End cap made of PE-PP for DACHFIX RESIST Type 45	-	115	45	0,1	63125
End cap closed, silver, for DACHFIX RESIST Type 75	-	115	75	0,1	63025
PE-PP locking handle, silver, for DACHFIX RESIST	100	23	17	0,1	63020
Height adjusting set for DACHFIX RESIST, height 75 mm	-	-	-	0,2	63095

* Please order locking seperately.

** height adjustable from 81 to 102 mm.


DACHFIX®RESIST

LINEFIX®	RECYFIX® GREEN	RECYFIX®POINT FASERFIX®POINT	FASERFIX® STANDARD	Slotted Channel	DACHFIX®	RECYFIX® STANDARD	RECYFIX® PLUS	RECYFIX® PRO
----------	-------------------	---------------------------------	-----------------------	-----------------	----------	----------------------	------------------	-----------------

DACHFIX®STEEL 115

DACHFIX®STEEL 115 Channels made of galvanised steel, height 45 mm

Type 45 with mesh grating MW 8/21, silver

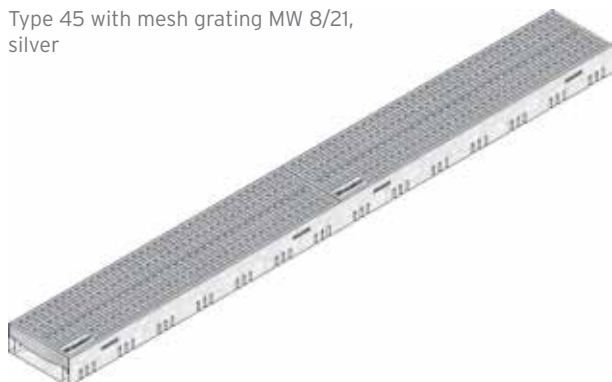



	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Type 45 DP, with longitudinal grating made of PE-PP	1000	115	45	26	637	2,9	61052
Type 45 with longitudinal grating, galvanised	1000	115	45	26	-	5,4	61066
Type 45 with mesh grating MW 8/21, silver	1000	115	45	26	511	3,9	61042
Type 45 with mesh grating MW 8/21, black	1000	115	45	26	250	2,9	61032
Type 45 with slotted grating SW 9, galvanised	1000	115	45	26	256	3,4	61012
Type 45 with mesh grating MW 30/10, galvanised	1000	115	45	26	828	4,6	61022
Type 45 with perforated grating, diam. 6 mm, galvanised	1000	115	45	26	-	4,0	61068

**DACHFIX Channels are walkable and wheelchair passable.
Fixing of mesh gratings with bolts possible.**

DACHFIX®STEEL 115

DACHFIX®STEEL 115 Channels made of galvanised steel, height 75 mm

Type 75 with longitudinal grating, galvanised

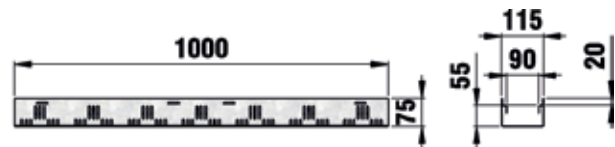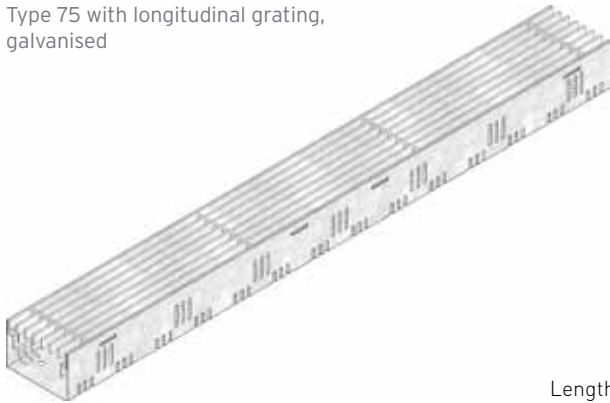

	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Type 75 with longitudinal grating, PE-PP, silver	1000	115	75	59	637	3,4	61152
Type 75 with longitudinal grating, galvanised	1000	115	75	59	-	5,4	61166
Type 75 with mesh grating MW 8/21, silver	1000	115	75	59	511	3,5	61142
Type 75 with mesh grating MW 8/21, black	1000	115	75	59	250	3,5	61132
Type 75 with slotted grating SW 9, galvanised	1000	115	75	59	256	3,8	61112
Type 75 with mesh grating MW 30/10, galvanised	1000	115	75	59	828	5,1	61122
Type 75 with perforated grating, diam. 6 mm, galvanised	1000	115	75	59	-	4,0	61168

Fixing of mesh gratings with bolts possible.

RECYFIX®
PRO

RECYFIX®
PLUS

RECYFIX®
STANDARD

DACHFIX®

Slotted Channel

FASERFIX®
STANDARD

RECYFIX®POINT
FASERFIX®POINT


RECYFIX®
GREEN

LINEFIX®

DACHFIX®STEEL 115

DACHFIX®STEEL 115 Channels made of stainless steel, height 45 mm

Type 45 DP, stainless steel,
with longitudinal grating
made of PE-PP


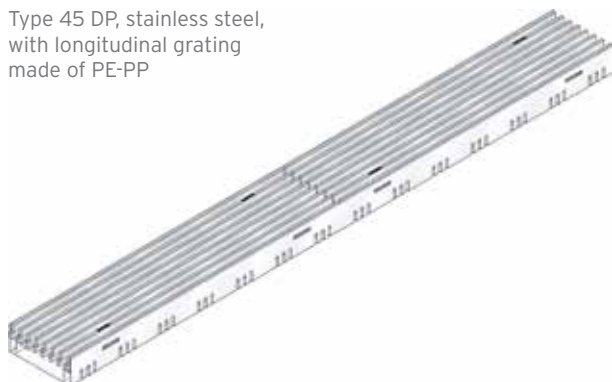


	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Type 45 DP, stainless steel, with longitudinal grating made of PE-PP	1000	115	45	26	637	2,9	61252
Type 45 with Longitudinal grating, stainless steel	1000	115	45	26	-	5,4	61267
Type 45 with mesh grating MW 8/21, silver	1000	115	45	26	511	3,0	61242
Type 45 with mesh grating MW 8/21, black	1000	115	45	26	250	3,0	61232
Type 45 with slotted grating SW 9, stainless steel	1000	115	45	26	256	3,3	61212
Type 45 with mesh grating MW 30/10, stainless steel	1000	115	45	26	828	4,7	61222
Type 45 with perforated grating 6 mm, stainless steel	1000	115	45	26	-	4,0	61269

DACHFIX Channels are walkable and wheelchair passable.
The quality of stainless steel material corresponds to CNS 1.4301.
Fixing of mesh gratings with bolts possible.

DACHFIX®STEEL 115 Channels made of stainless steel, height 75 mm

Type 75 with longitudinal grating,
PE-PP, silver

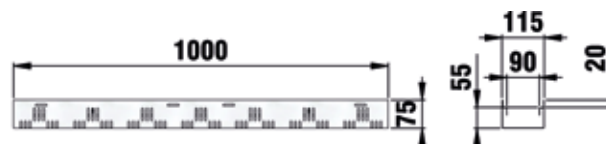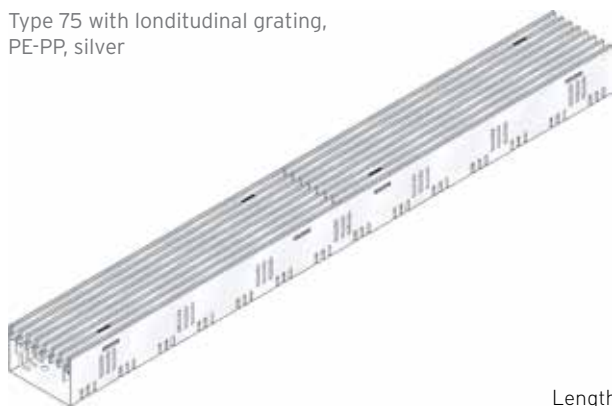

	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Type 75 with longitudinal grating, PE-PP, silver	1000	115	75	59	637	3,5	61352
Type 75 with longitudinal grating, stainless steel	1000	115	75	59	-	5,9	61367
Type 75 with mesh grating MW 8/21, black	1000	115	75	59	250	3,5	61332
Type 75 with mesh grating MW 8/21, silver	1000	115	75	59	511	3,5	61342
Type 75 with slotted grating SW 9, stainless steel	1000	115	75	59	256	3,8	61312
Type 75 with mesh grating MW 30/10, stainless steel	1000	115	75	59	828	5,2	61322
Type 75 with perforated grating 6 mm, stainless steel	1000	115	75	59	-	4,5	61369

Fixing of mesh gratings with bolts possible.

DACHFIX®STEEL 115

DACHFIX®STEEL 115, Accessories



End cap type 45



End cap type 75



Cross-intersection channel,
galvanised



Adjusting set for height
adjustment* of DACHFIX
Type 75, height 75 mm
(3 pieces per metre required)

	Length mm	Width mm	Height mm	Weight kg	Item No. galvanised	Item No. stainless steel
End cap type 45	-	115	45	0,1	61009	61209
End cap type 75	-	115	75	0,1	61109	61309
Cross-intersection channel	1000	70	30	0,7	60800	60801
Adjusting set for height adjustment* of DACHFIX Type 75, height 75 mm (3 pieces per metre required)	-	27	61	0,2	61150	61350

Height adjustable from 82 to 122 mm.

The quality of stainless steel material corresponds to CNS 1.4301.

RECYFIX®
PRO

RECYFIX®
PLUS

RECYFIX®
STANDARD

DACHFIX®

Slotted Channel

FASERFIX®
STANDARD

RECYFIX®POINT
FASERFIX®POINT



RECYFIX®
GREEN

LINEFIX®

DACHFIX®STEEL 200 **NEW**

DACHFIX®STEEL 200 Channels made of galvanised steel, height 50 mm

Type 50 with mesh grating,
MW 30/10

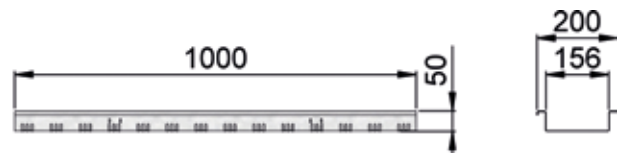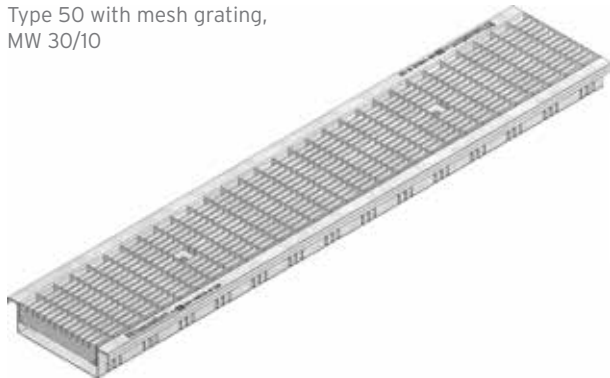

	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Type 50 with mesh grating, MW 30/10	1000	200	50	-	1098	9,1	61622

DACHFIX®STEEL 200 **NEW**

DACHFIX®STEEL 200, Accessories

Cross-intersection channel,
galvanised



	Length mm	Width mm	Height mm	Weight kg	Item No.
Cross-intersection channel, galvanised	1000	70	30	0,7	60800

RECYFIX®
PRO

RECYFIX®
PLUS

RECYFIX®
STANDARD

DACHFIX®

Slotted Channel

FASERFIX®
STANDARD

RECYFIX®POINT
FASERFIX®POINT



RECYFIX®
GREEN

LINEFIX®

DACHFIX®STANDARD

DACHFIX®STANDARD Channels Type 1, galvanised, height adjustable

Type 1 DP, with slotted grating SW 9

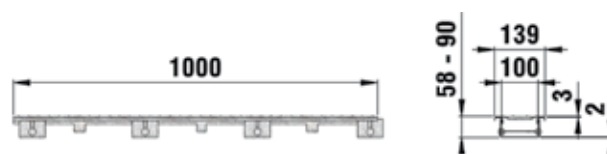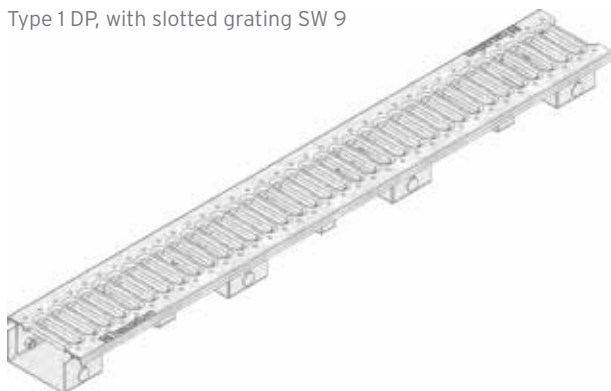



	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Type 1 DP, with slotted grating SW 9	1000	139	58 - 90	-	280	4,7	60070
Type 1 DP, with mesh grating MW 30/10	1000	139	58 - 90	-	650	6,6	60080
Type 1 DP, with perforated grating diam. 6	1000	139	58 - 90	-	161	5,6	60078

DACHFIX Channels are walkable and wheelchair passable.

All DACHFIX STANDARD channels are also available as tailor-made solutions in stainless steel CNS 1.4301, but with longer delivery times.

DACHFIX®STANDARD Channels Type 2, galvanised, height adjustable

Type 2 DP, with slotted grating SW 9

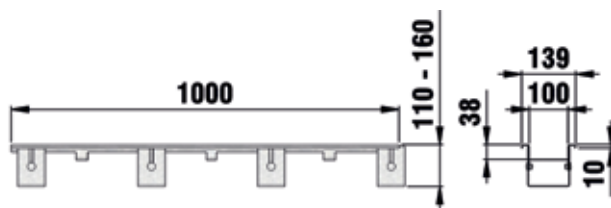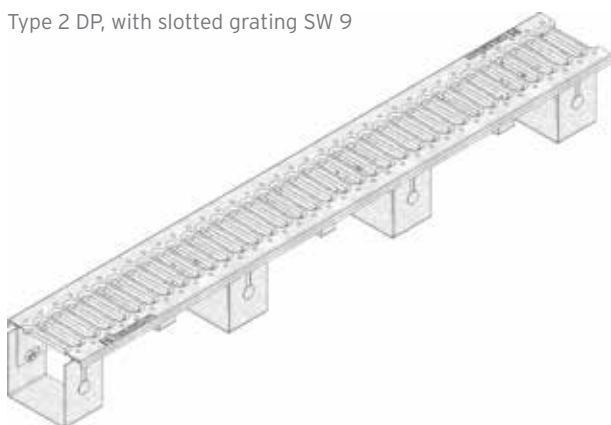

	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Type 2 DP, with slotted grating SW 9	1000	139	110 - 160	-	280	5,3	60170
Type 2 DP, with mesh grating MW 30/10	1000	139	110 - 160	-	650	7,2	60180
Type 2 DP, with perforated grating diam. 6	1000	139	110 - 160	-	161	8,7	60178


DACHFIX Channels are walkable and wheelchair passable.

All DACHFIX STANDARD channels are also available as tailor-made solutions in stainless steel CNS 1.4301, but with longer delivery times.

DACHFIX®STANDARD

DACHFIX®STANDARD Channels Type 3, galvanised, height adjustable

Type 3 DP, with mesh grating
MW 30/10

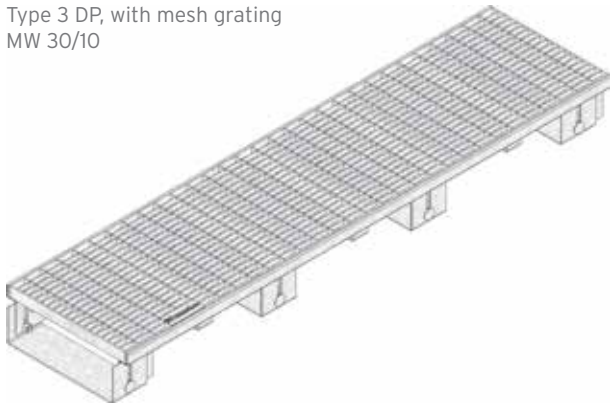


	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Type 3 DP, with mesh grating MW 30/10	1000	252	90 - 130	-	1966	9,2	60280

DACHFIX Channels are walkable and wheelchair passable.

All DACHFIX STANDARD channels are also available as tailor-made solutions in stainless steel CNS 1.4301, but with longer delivery times.

DACHFIX®STANDARD, Accessories

Perforated side wall,
galvanised, for Type 2

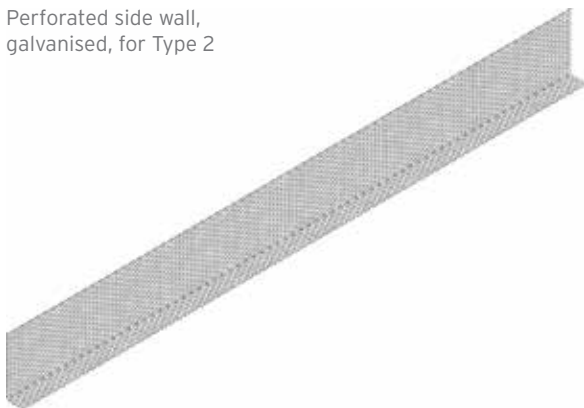

Cross-intersection channel,
galvanised



	Length mm	Width mm	Height mm	Weight kg	Item No.
Perforated side wall, galvanised, for Type 1	1000	29	50	0,3	60700
Perforated side wall, galvanised, for Type 2	1000	27	100	0,4	60721
Perforated side wall, galvanised, for Type 3/4	1000	32	70	0,6	60741
Cross-intersection channel, galvanised	1000	70	30	0,7	60800

DACHFIX Channels are walkable and wheelchair passable.

All DACHFIX STANDARD channels are also available as tailor-made solutions in stainless steel CNS 1.4301, but with longer delivery times.

RECYFIX®
PRO

RECYFIX®
PLUS

RECYFIX®
STANDARD

DACHFIX®

Slotted Channel

FASERFIX®
STANDARD

RECYFIX®POINT
FASERFIX®POINT



RECYFIX®
GREEN

LINEFIX®

DACHFIX®POINT

DACHFIX®POINT Type 1, height 60 mm, 250 x 250 mm

Gully extension Type 1 with slotted grating, galvanised

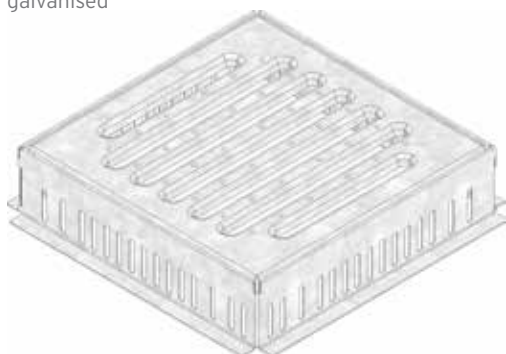



	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Gully extension Type 1 with slotted grating, galvanised	250	250	60	-	116	1,7	60620
Gully extension Type 1 with mesh grating, MW 30/10, galvanised	250	250	60	-	398	1,4	60610

DACHFIX POINT gullies are walkable and wheelchair passable.

All DACHFIX STANDARD channels are also available as tailor-made solutions in stainless steel CNS 1.4301, but with longer delivery times.

DACHFIX®POINT Type 2, height 60 mm, 400 x 400 mm

Gully extension Type 2 with mesh grating MW 30/10, galvanised

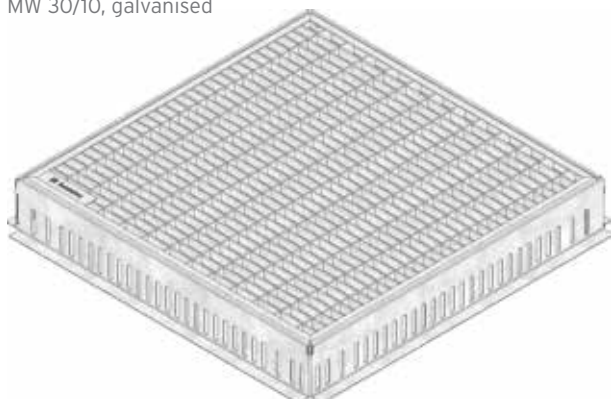

	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Gully extension Type 2 with mesh grating MW 30/10, galvanised	400	400	60	-	1069	5,7	60640


DACHFIX POINT gullies are walkable and wheelchair passable.

All DACHFIX STANDARD channels are also available as tailor-made solutions in stainless steel CNS 1.4301, but with longer delivery times.

DACHFIX®POINT

DACHFIX®POINT Type 1, height adjustable, 250 x 250 mm

Gully extension Type 1 with slotted grating, galvanised

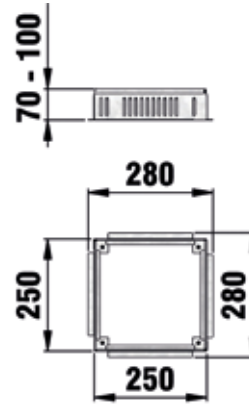



	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Gully extension Type 1 with slotted grating, galvanised	250	250	70 - 100	-	116	4,3	60542
Gully extension Type 1 with mesh grating, MW 30/10, galvanised	250	250	70 - 100	-	398	4,0	60541

DACHFIX POINT gullies are walkable and wheelchair passable.

All DACHFIX STANDARD channels are also available as tailor-made solutions in stainless steel CNS 1.4301, but with longer delivery times.

DACHFIX®POINT Type 1, height adjustable, 400 x 400 mm

Gully extension Type 2 with mesh grating, MW 30/10, galvanised

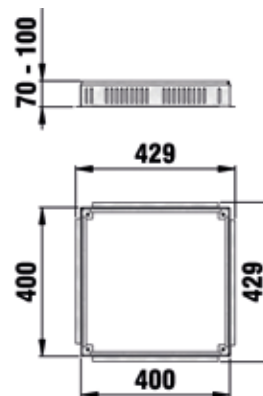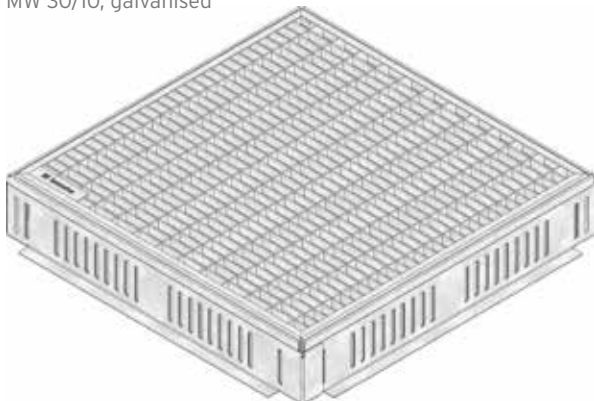

	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Gully extension Type 2 with mesh grating, MW 30/10, galvanised	400	400	70 - 100	-	1069	7,2	60591

DACHFIX POINT gullies are walkable and wheelchair passable.

All DACHFIX STANDARD channels are also available as tailor-made solutions in stainless steel CNS 1.4301, but with longer delivery times.

RECYFIX®
PRO

RECYFIX®
PLUS

RECYFIX®
STANDARD

DACHFIX®

Slotted Channel

FASERFIX®
STANDARD

RECYFIX®POINT
FASERFIX®POINT

RECYFIX®
GREEN

LINEFIX®